- `M`, the maximum number of entries in a node; this value is usually set so that a full node will fit in a page of memory.
- `m`, such that `m ≤ M/2`, the minimum number of entries in a node. This parameter indirectly control the minimum height of the tree, as we'll see.

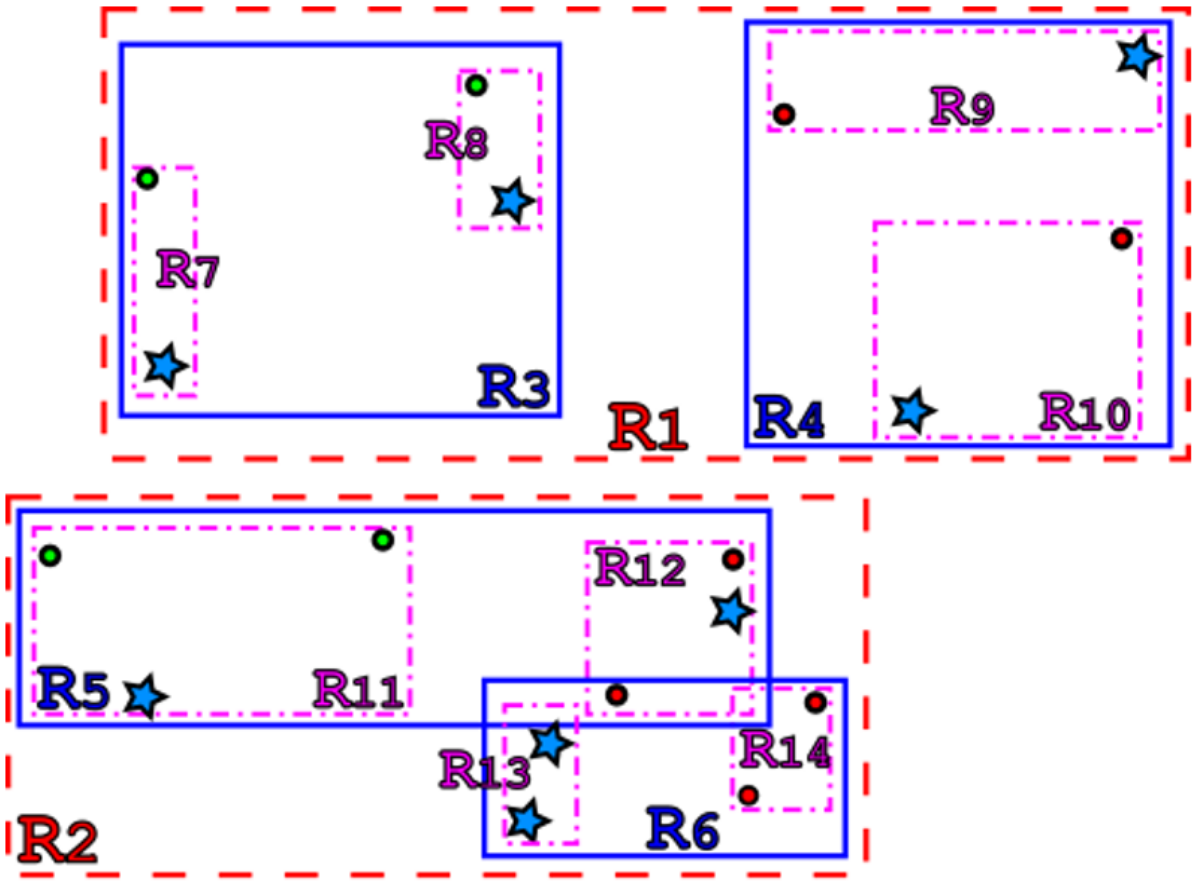


Figure 10.3 Cartesian plane representation of a (possible) R-tree for our city maps as presented in the example of figure 9.4 (the names of the cities are omitted to avoid confusion). This R-tree contains 12 bounding rectangles, from R_1 to R_{12}, organized in a hierarchical structure. Notice that rectangles can and do overlap, as shown in the bottom half.