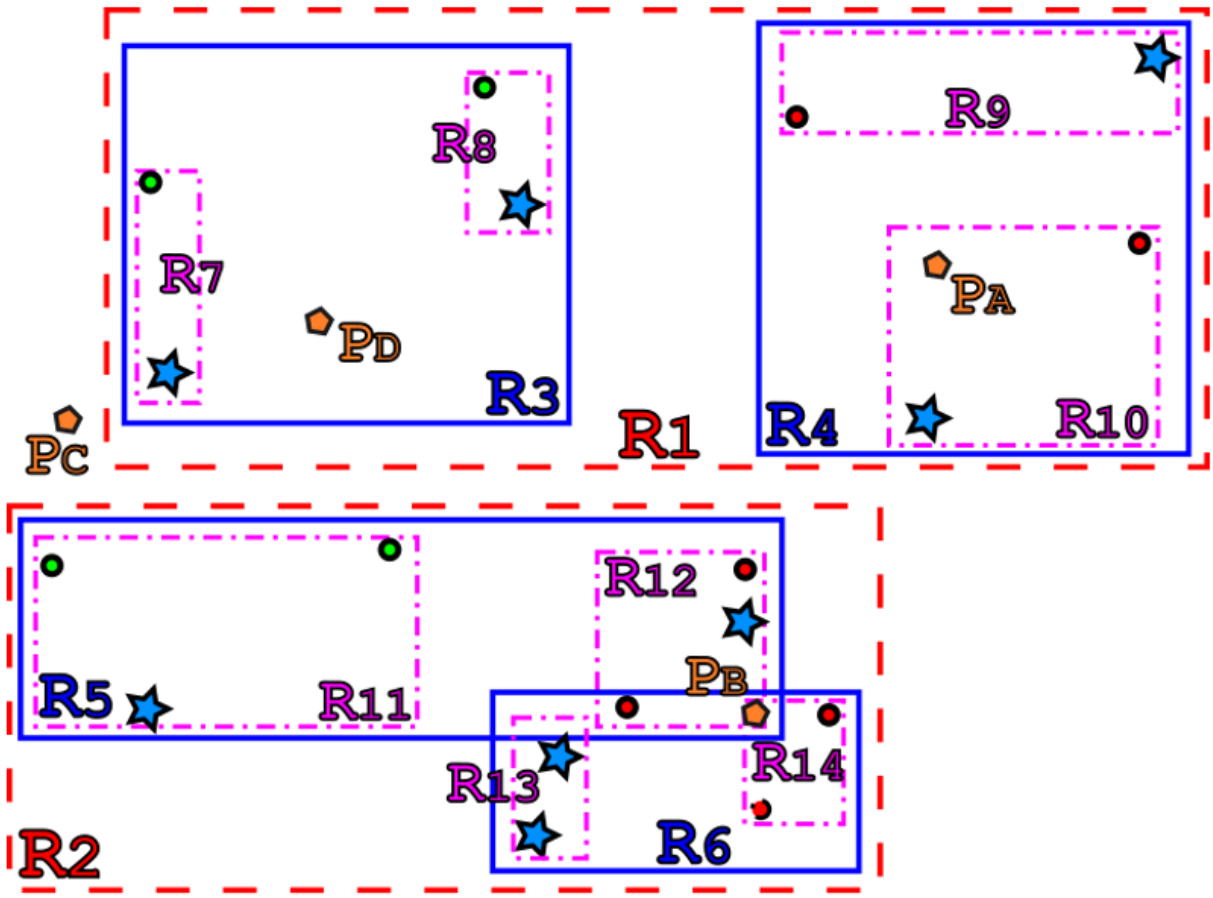


Figure 10.6 Choosing the R-tree leaf's rectangle to which a point should be added: the new point can lie within a leaf rectangle (P_A), within the intersection of two or more leaves' rectangles (P_B), or outside any of the leaves (P_C and P_D).

Figure 10.4 shows how these properties translates into a tree data structure: here the difference with k-d trees is even more evident!

Each internal node is a list of rectangles (between `m` and `M` of them, as mentioned), while leaves are lists of (again, between `m` and `M`) points; each rectangle is effectively determined by its children, and could indeed be defined