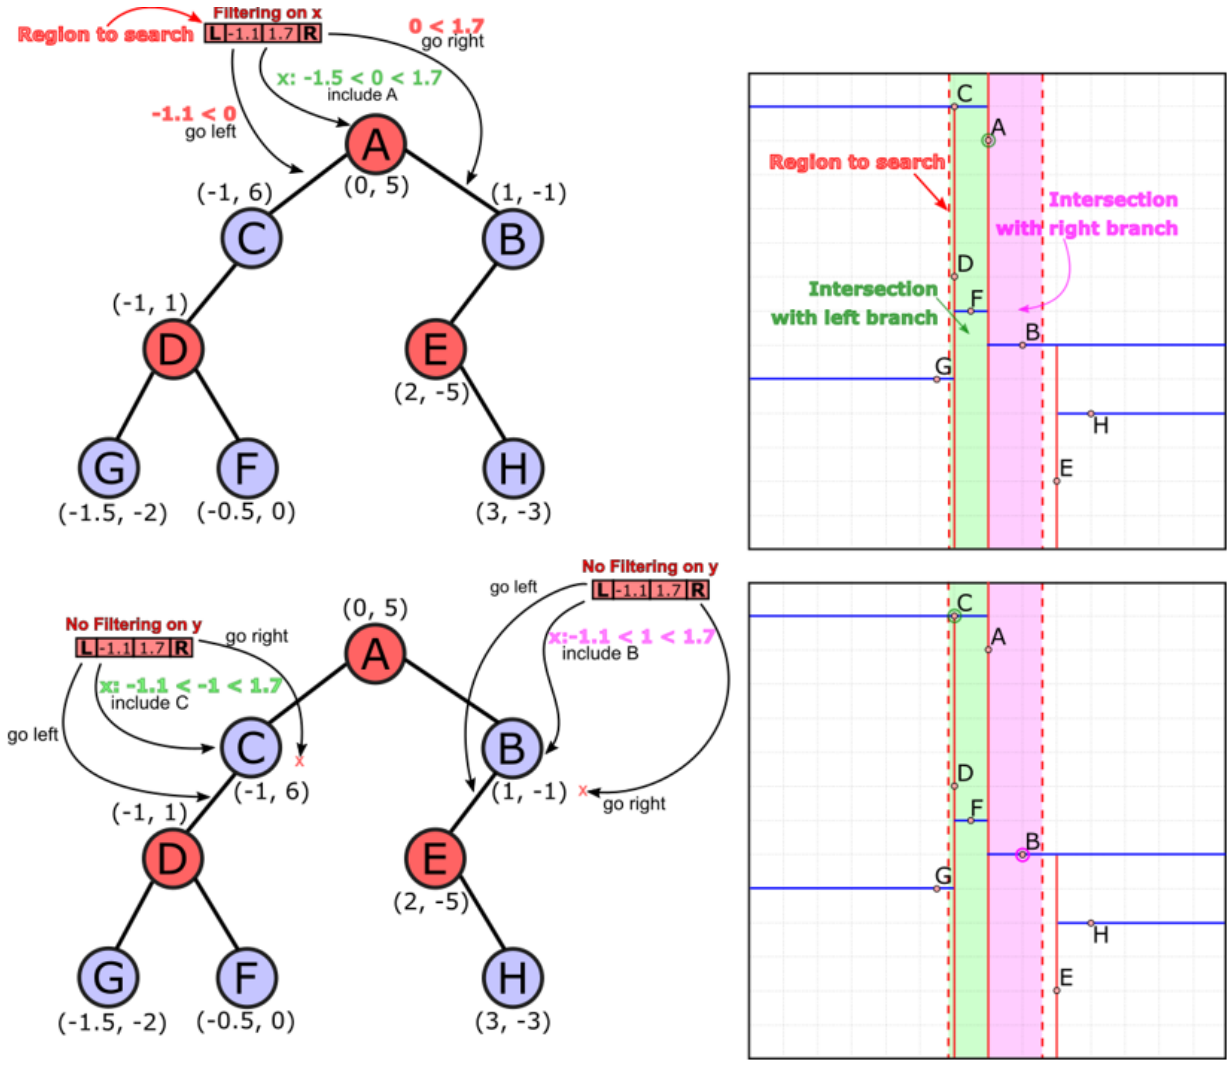


Figure 11.11 An example of running a partial query on a k-d tree. The example shows a partial range query on 2-d tree with fields `x` and `y`, where the search specifies a criterion only on `x`: take all points whose `x` value is between `-1.1` and `1.7`, independently on the value of `y`. In the first step, filtering is applied on the x coordinates of the root, since the first split is on the x coordinate. The second step, on nodes `C` and `B`, doesn't perform any filtering, because the split on those nodes is on the y coordinates, while the partial search is only about a `x` range. The `x` coordinates of