which is also density-based: table 12.1 summarizes the “identity card” for the three algorithms presented in this chapter.

Don’t worry, in the next sections for each of these properties we will explain in detail what it means, and provide examples to make the distinction clearer.

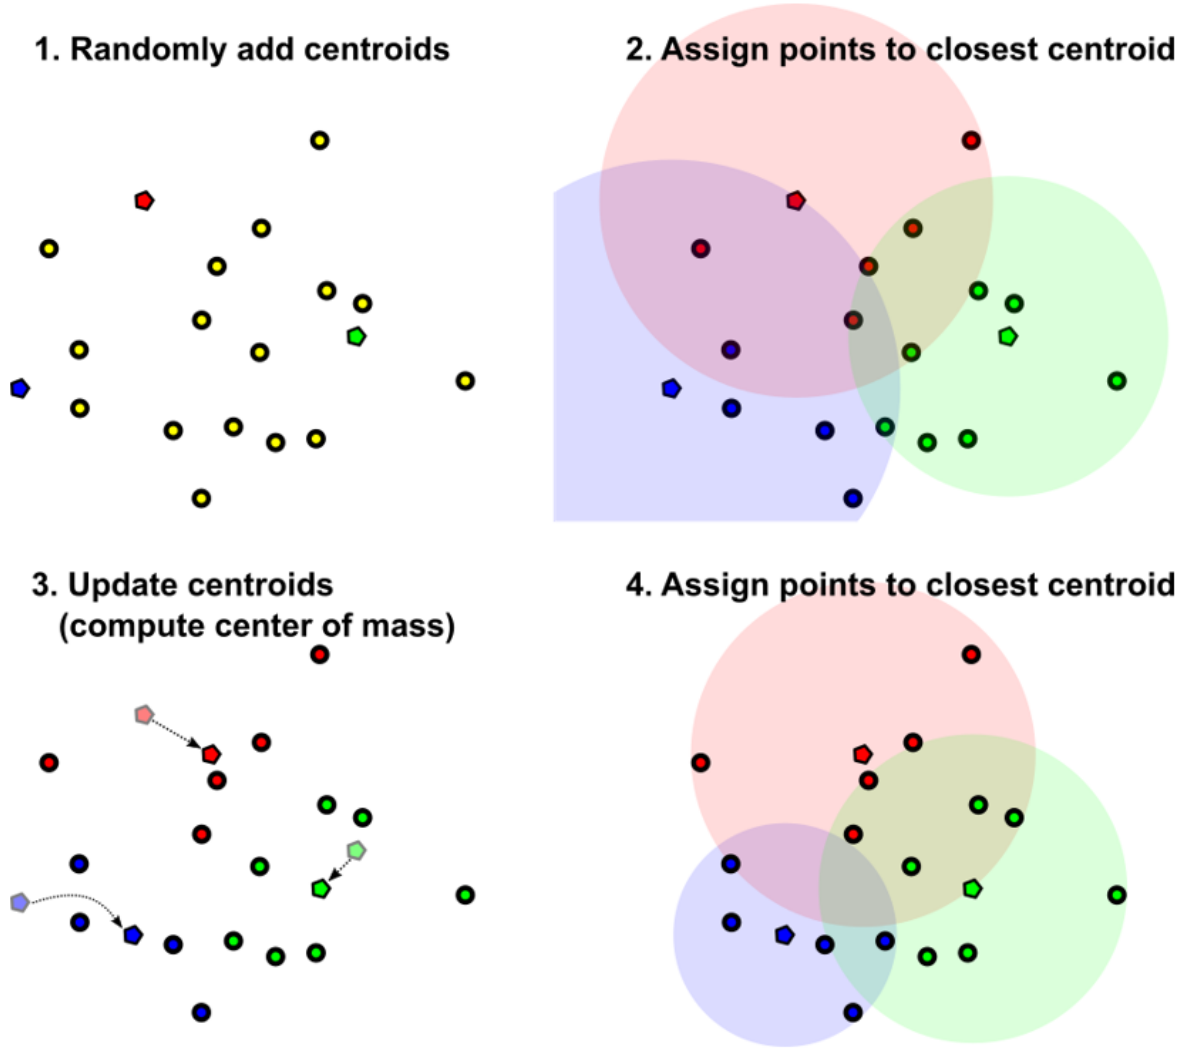


Figure 12.3 An example of the k-means algorithm with k==3. Dataset points are initially yellow.
Step 1: k centroids (shaped as pentagons) are randomly created. Each centroid is assigned a