through the trouble of creating and searching a k-d tree at each iteration, we ran some profiling, that you can check out on the book's repo.

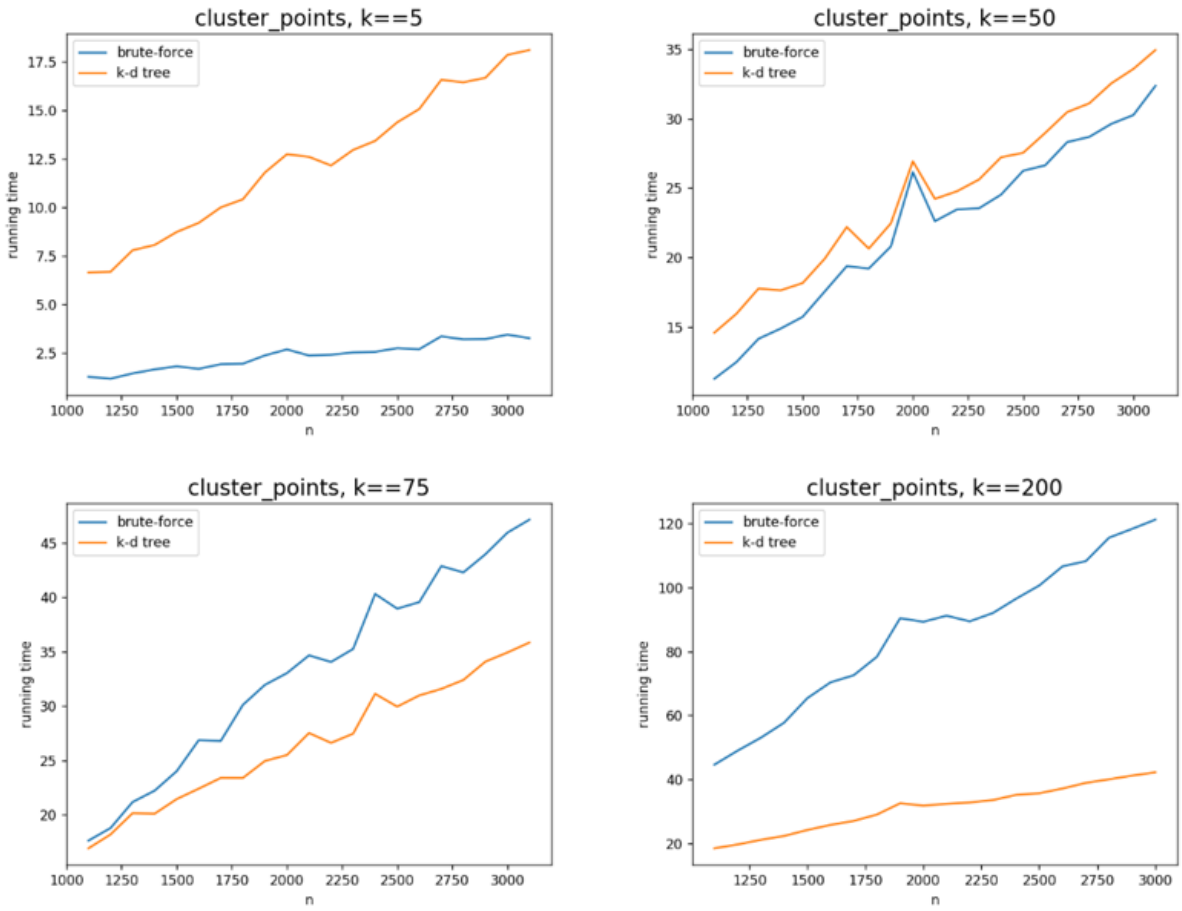


Figure 12.7 Running time comparison between `classifyPoints` implementations using brute-force search and k-d tree's nearest neighbor. The running times are shown as functions of `n`, the number of points, for fixed values of `k`, the number of centroids. (top left) k==5, the method using k-d tree is always slower, and its running time grows faster. (top right) k == 50, the method using a k-d tree is still slower, but its growth is similar to the brute-force one.