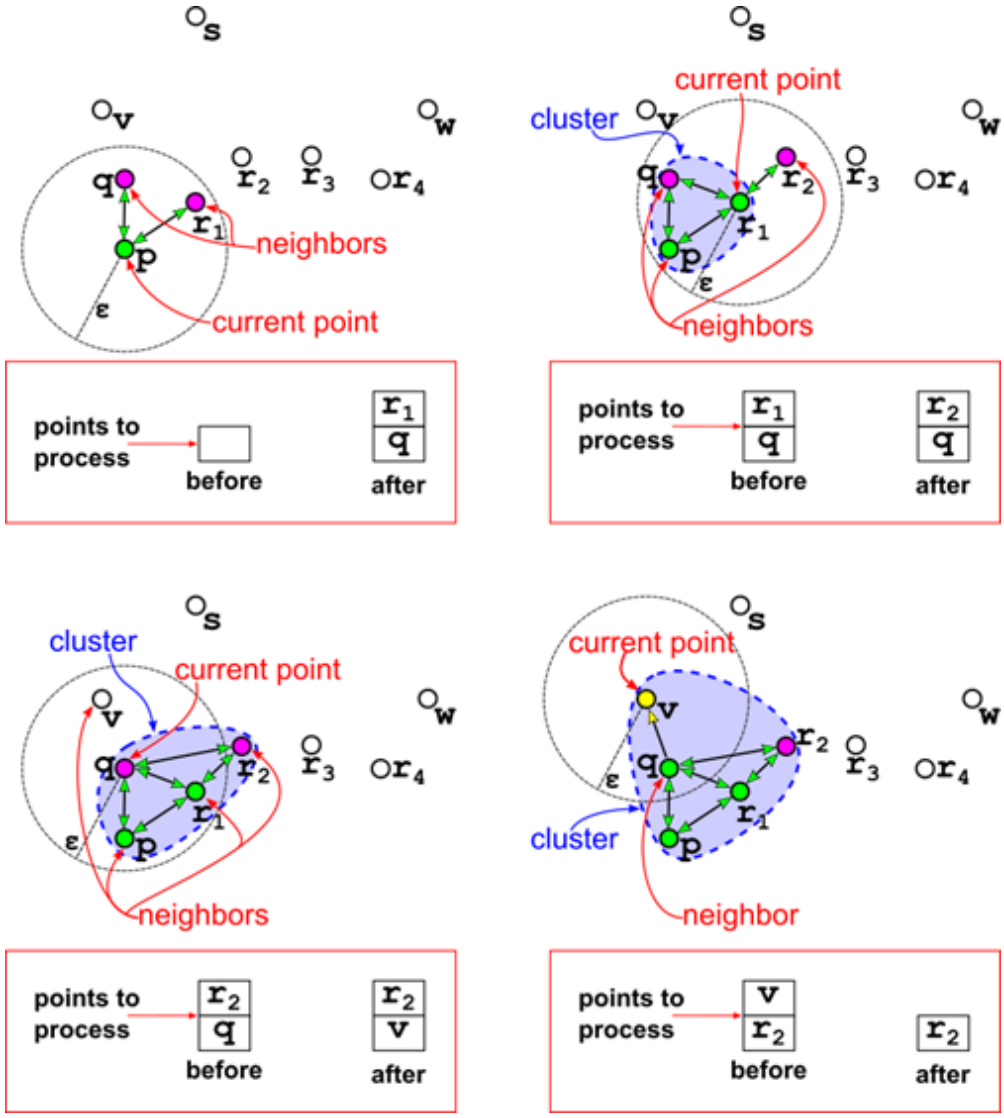


Figure 12.10 A few steps of the main loop of DBSCAN. When core points are processed (the first three steps in the figure) all their *undiscovered* neighbors are added to current cluster, and to a set (not a queue) of points to be processed. Conversely, when the current point being processed is not a core point, like v in the last step, then no further action is taken.

As you can see from figures 12.9-10, if p is a core point and w is directly reachable from it, then the distance between w and p must be at most ε: therefore, when we check p, we will