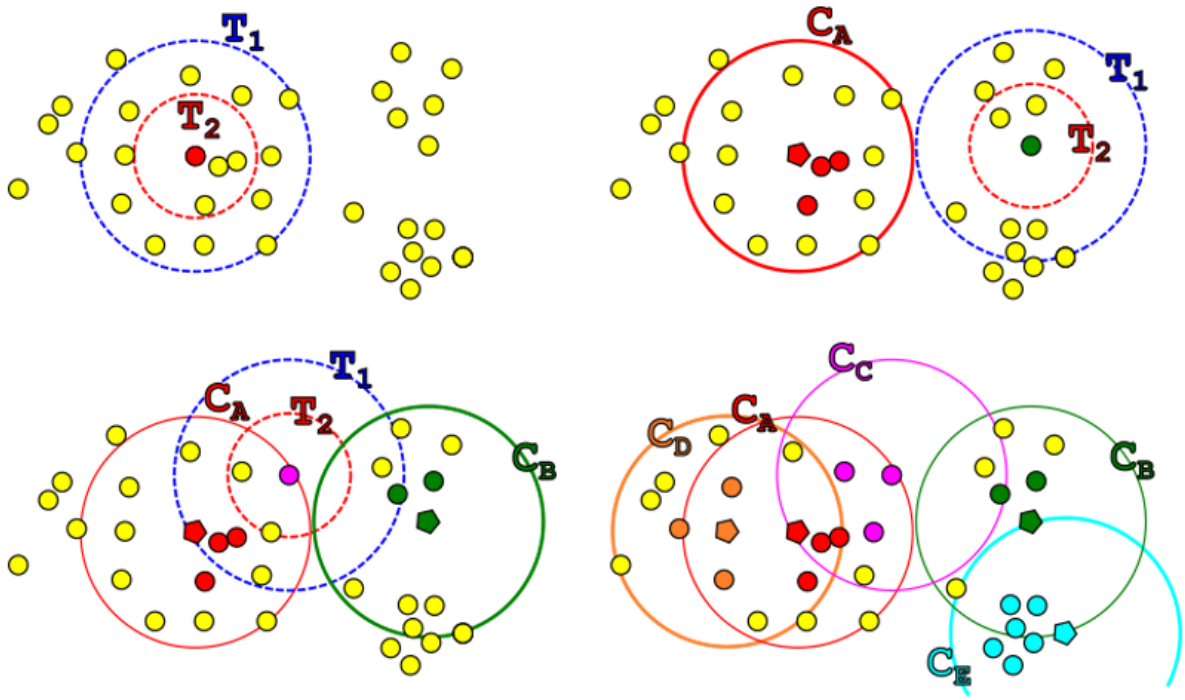


Figure 13.2 An example of canopy clustering running on a dataset. The first three sub-figures show the creation of tree canopies, starting from randomly chosen points. Circles filled with a solid color other than yellow are points removed from the list of possible centroids, while pentagons are the centroids of canopies whose border has the same color. The solid-color points are removed from the list because within the inner radius (T_2) from the centroids (as shown in the first three steps).
The last sub-figure shows the clusters created a few steps ahead. Note that there are still some yellow points, so at least 3 more canopies (that will partially overlap the 5 shown) will be created to include those points.

The algorithm can be made even faster if, instead of the exact distance metric for points in k-dimensional space, a