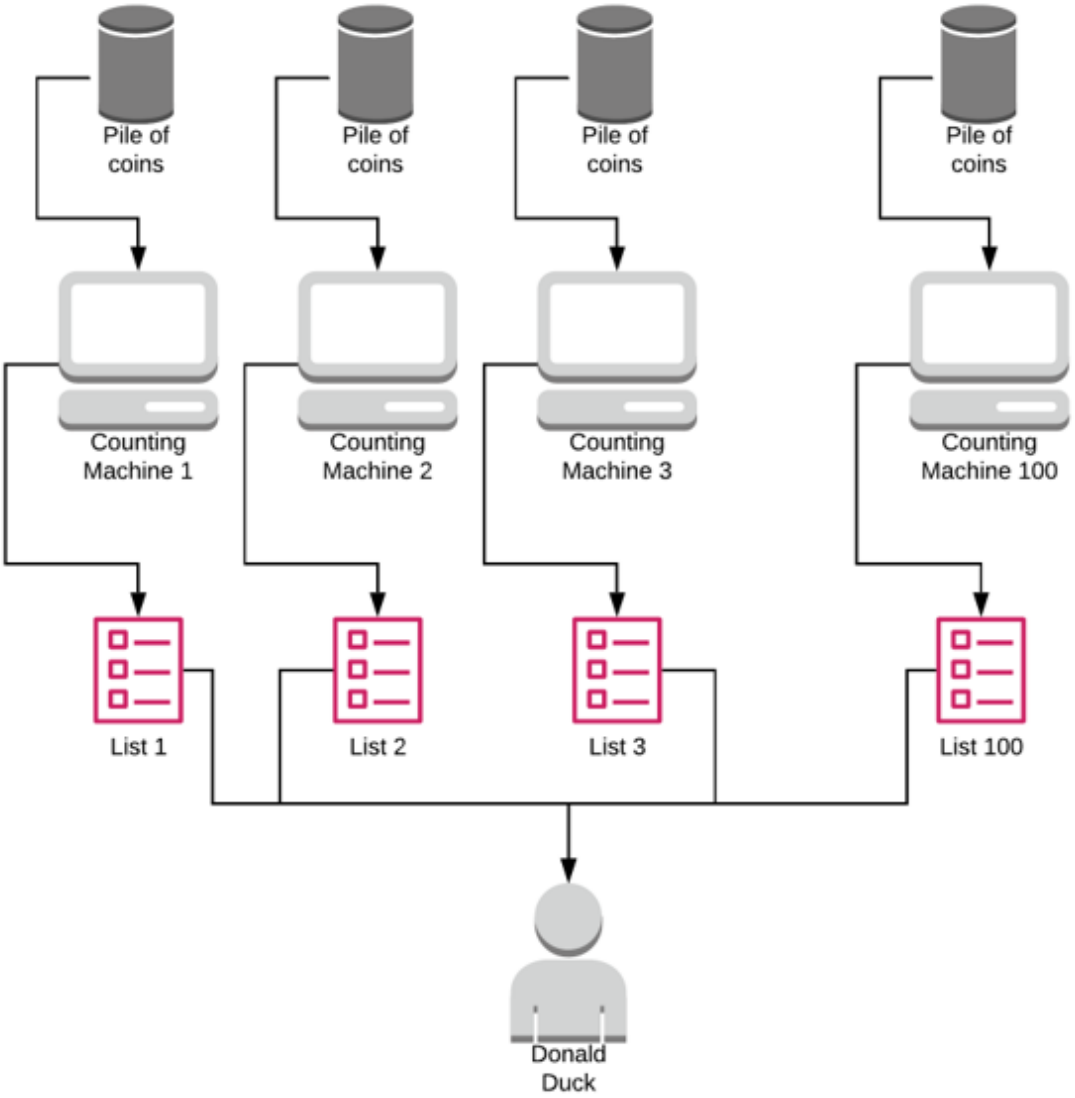


Figure 13.4 A first attempt to parallelize coin counting. In this configuration, poor Donald still has to sum hundreds of lists with hundreds of entries each.

This step, is the “classical” parallelization step: you break the work down (in piles of coins) to several copies of your software (the counting/catalogue routine) and write down, for each pile, what coins you found and how many of them