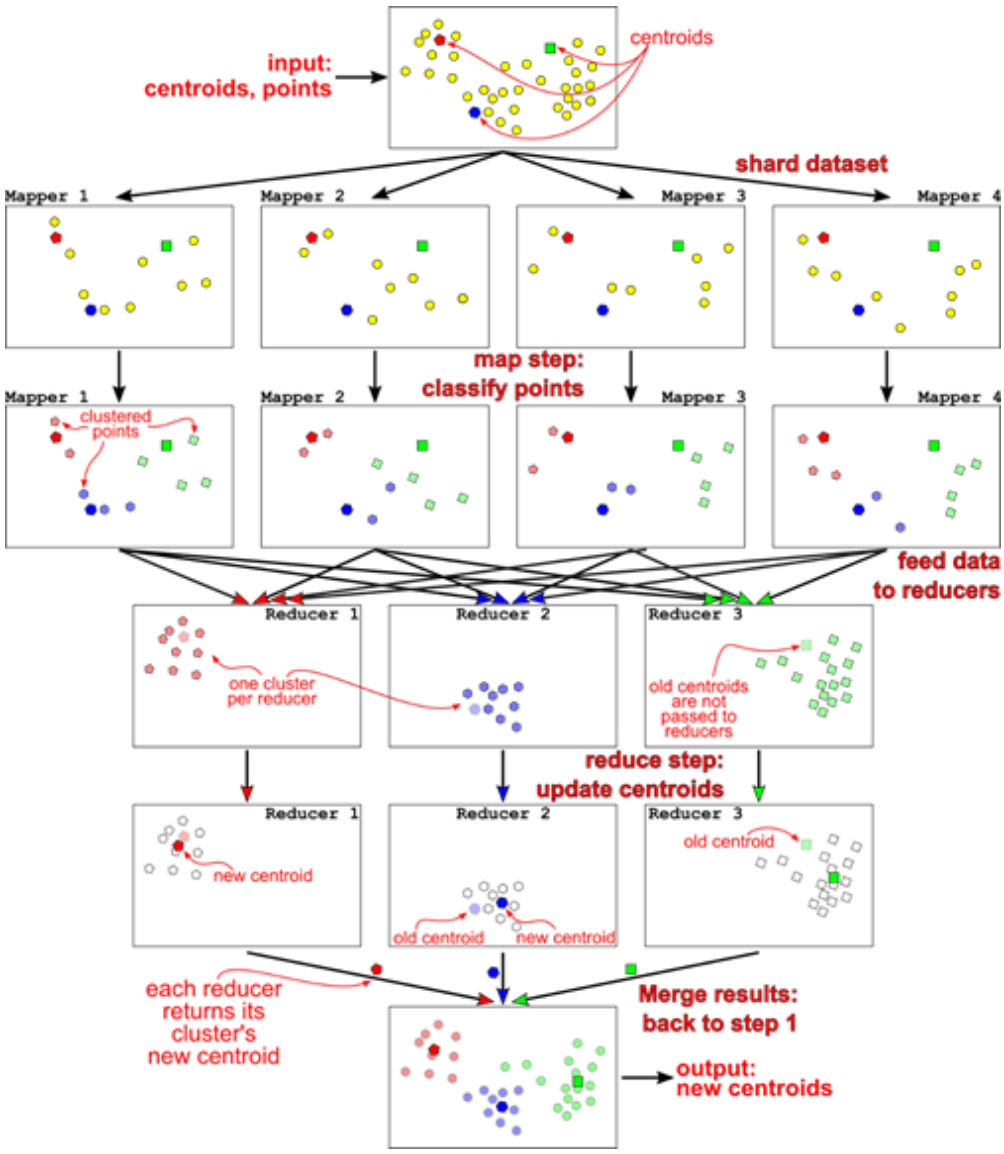


Figure 13.8 An iteration of k-means main cycle implemented with iterative MapReduce. With respect to figure 13.7, the first step shown here is the "sharding + configuration", while the rest of the figure shows a single iteration of "Iterative MapReduce".

Each reducer eventually outputs the centroid computed (and just that, no points returned, to save bandwidth and ultimately time) and the MapReduce master will combine the