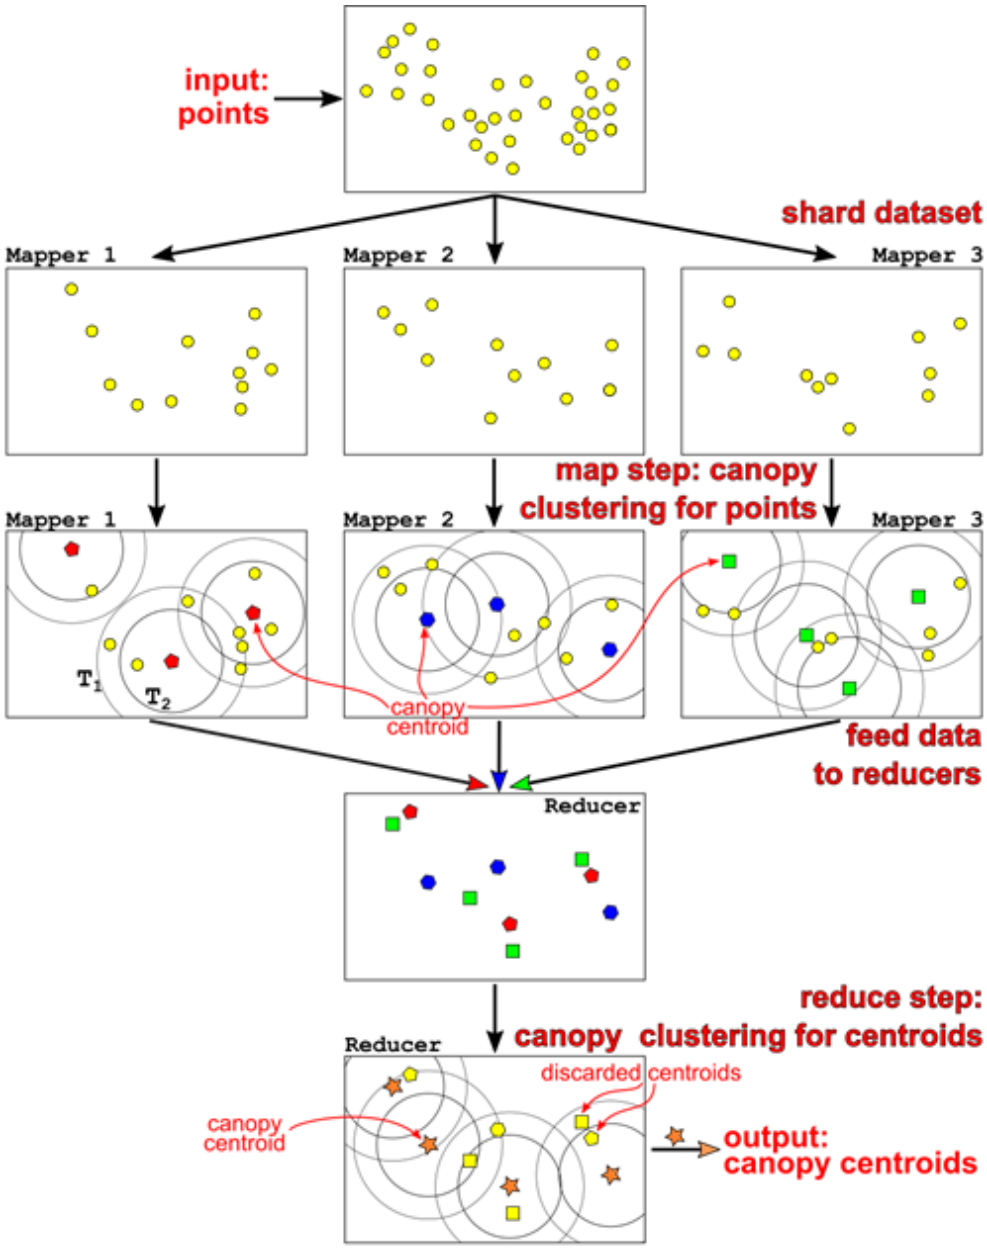


Figure 13.9 Canopy clustering implemented with MapReduce.

Suppose we shard our initial dataset, as shown in the top step of figure 13.9: if then we apply canopy clustering to each shard independently, we'll get a certain number of centroids, probably different from mapper to mapper; if we re-combine these centroids together, however, we have no