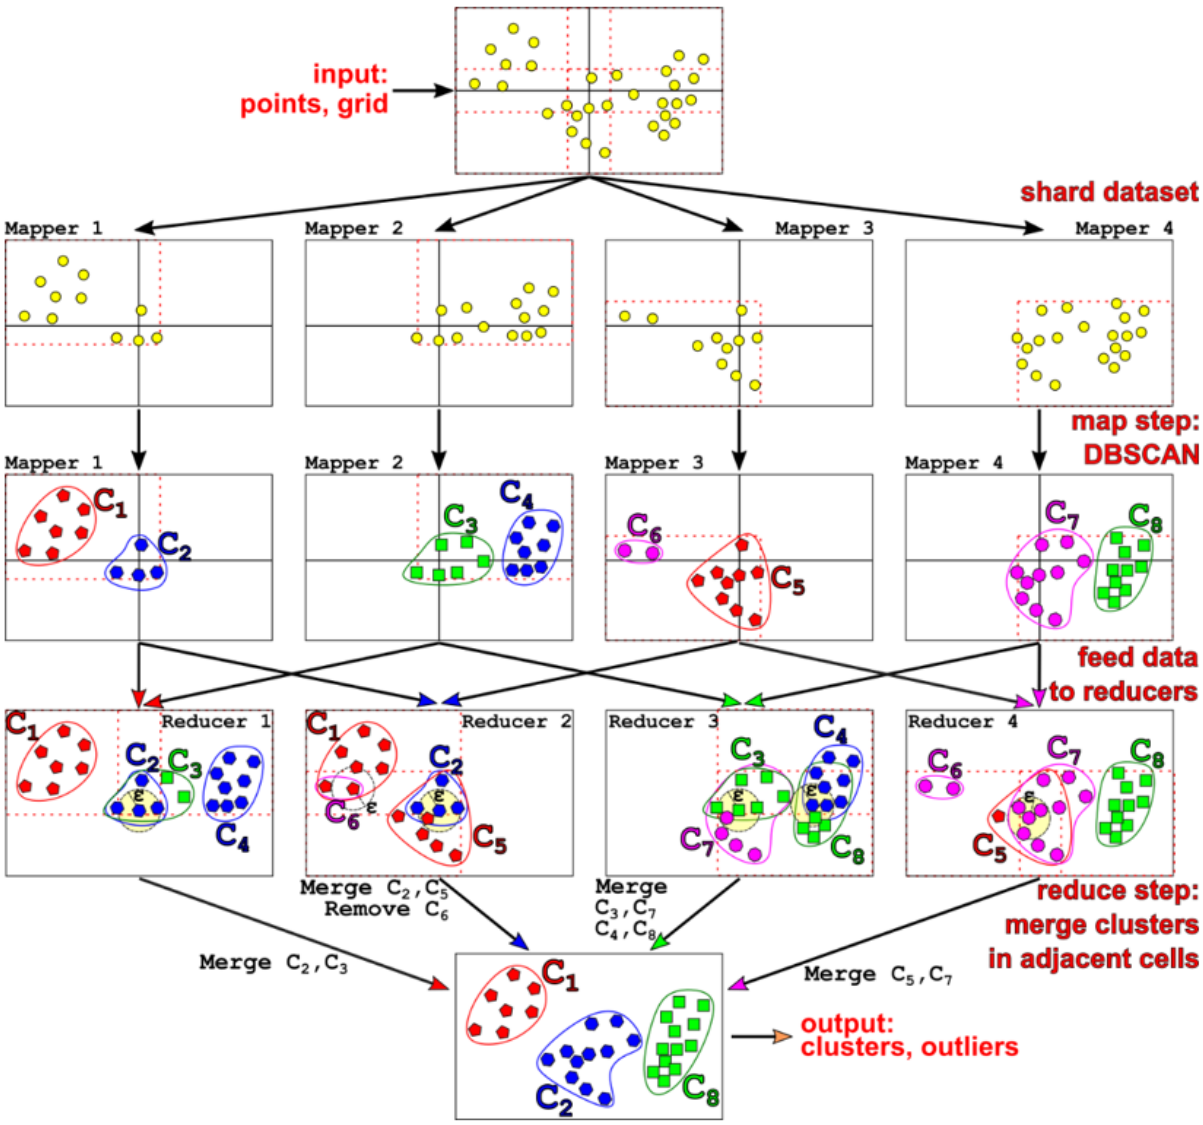


Figure 13.13 An example of MapReduce DBSCAN running with 4 cells. We'll need one mapper for each (extended) cell, and one reducer for each pair of adjacent cells. Since the dataset in the example is small and we use just 4 cells with a large value for ε, the fraction of points in the margin is unrealistically high: in real situations, there are relatively fewer cells in the borders, and the saving obtained by distributing the algorithm is order of magnitudes higher.