The partial ordering on DAGs provides a *topological sorting*, an ordering of the vertices such that, for any edge in the graph, the edge's starting point occurs before its ending point; usually each graph has several equivalent topological orderings; all *chains*, like the one in figure 14.7.E, certainly have a single unique topological sorting, but it's also possible that a non-chain graph also has a single topological sorting: see figure 14.7.A-B.

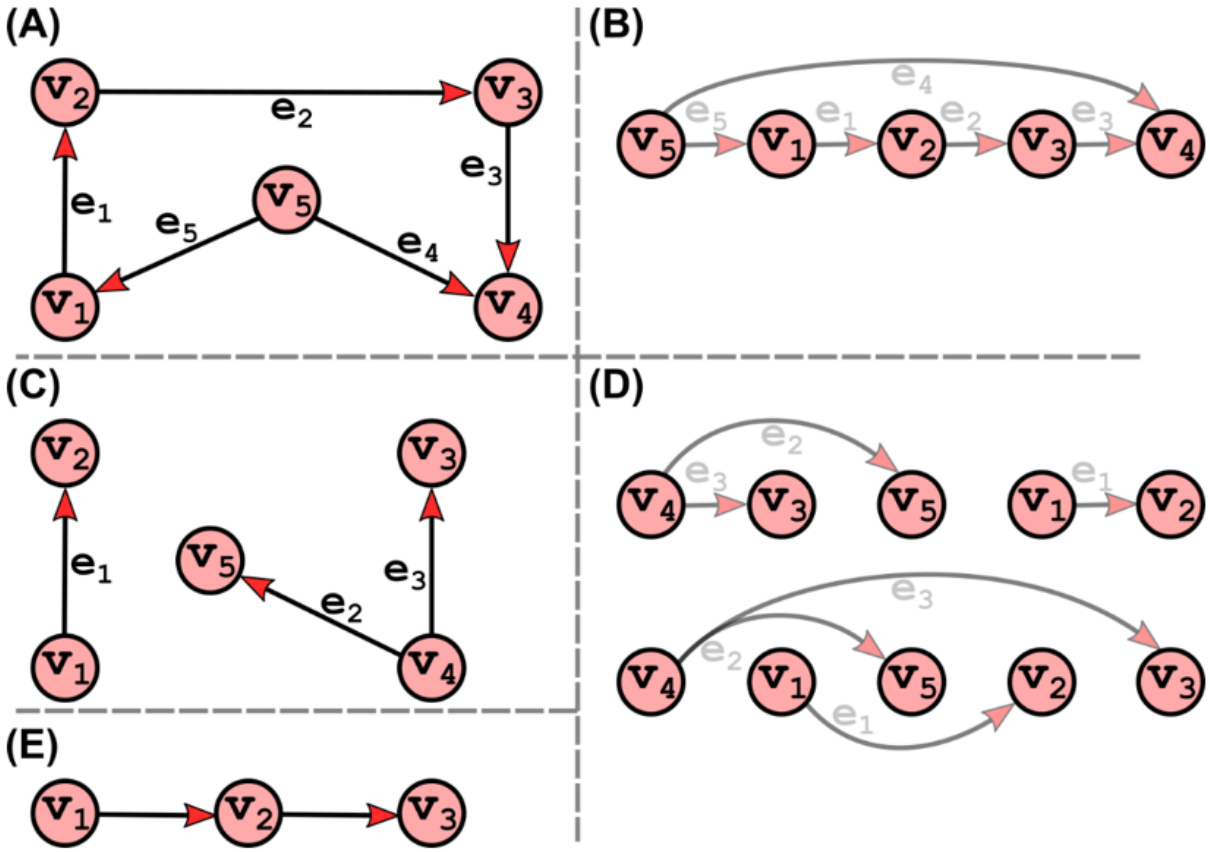


Figure 14.7 A few examples of DAGs.
(A) A connected DAG; (B) a topological sorting for the graph; notice that the output of topological sorting is just a sequence of vertices, edges are not considered; nevertheless, they are shown to demonstrate how they only go left-to-right, if vertices in the topological