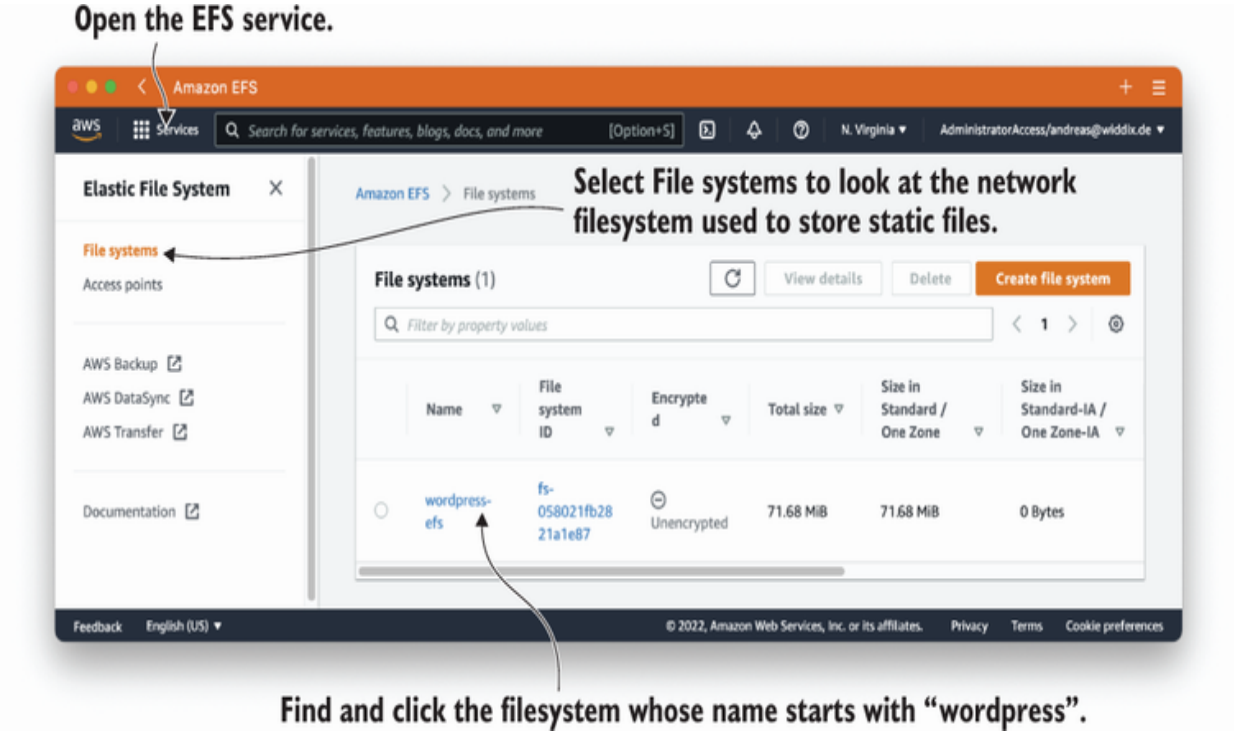


Figure 2.13 The NFS used to store the WordPress application and user uploads

Figure 2.14 shows the details of the filesystem. For example, the throughput mode *bursting* is used, to allow high I/O throughput for small periods of time during the day at low cost.