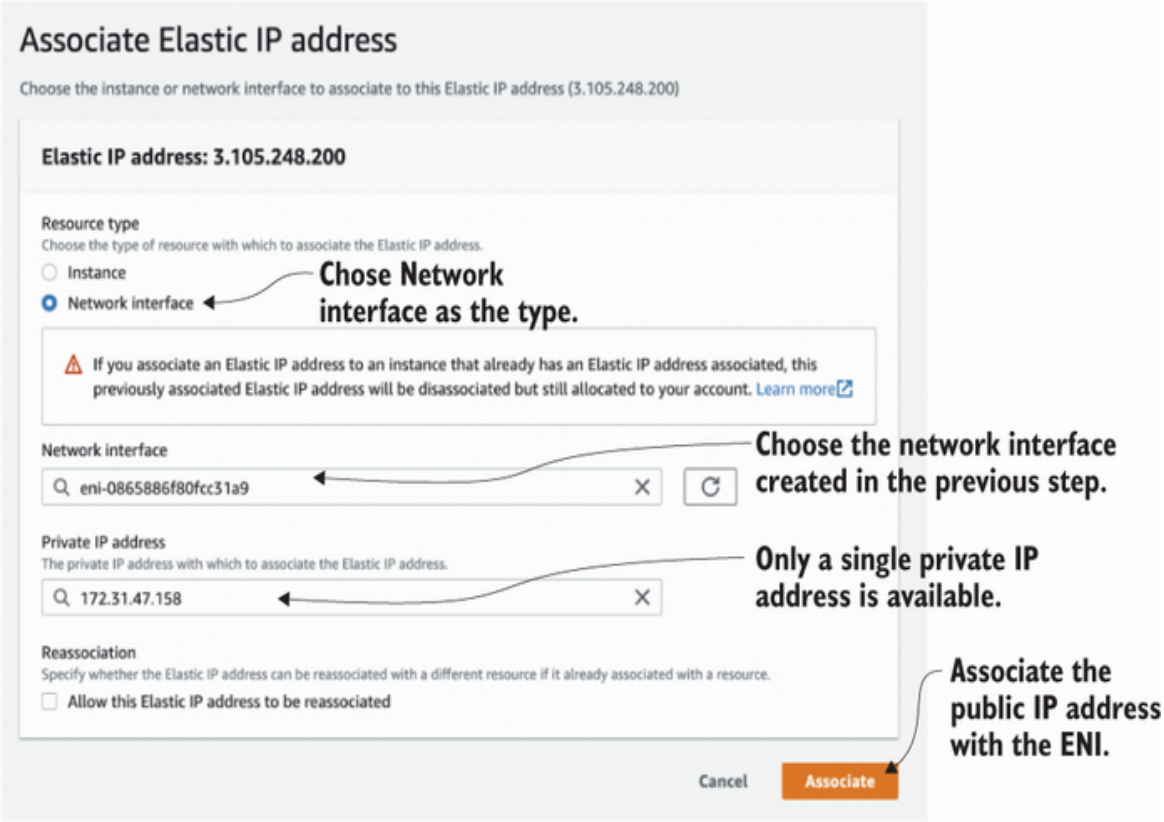


Figure 3.28 Associating a public IP address with the additional networking interface

Your virtual machine is now reachable under two different public IP addresses. This enables you to serve two different websites, depending on the public IP address. You need to configure the web server to answer requests depending on the public IP address. Use the Session Manager to connect to your EC2 instance named `sydney` and execute `ifconfig` in the terminal, which will output the network configuration of your virtual machine, shown here:

```
$ ifconfig
eth0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST>  mtu 9001
   inet 172.31.33.219  netmask 255.255.240.0  broadcast 172.31.47.255    ①
   inet6 fe80::495:5fff:fea6:abde  prefixlen 64  scopeid 0x20<link>
   ether 06:95:5f:a6:ab:de  txqueuelen 1000  (Ethernet)
   RX packets 68382  bytes 80442006 (76.7 MiB)
   RX errors 0  dropped 0  overruns 0  frame 0
   TX packets 35228  bytes 4219870 (4.0 MiB)
```