4. Select Manually Configure Launch Parameters, as shown in figure 3.29.

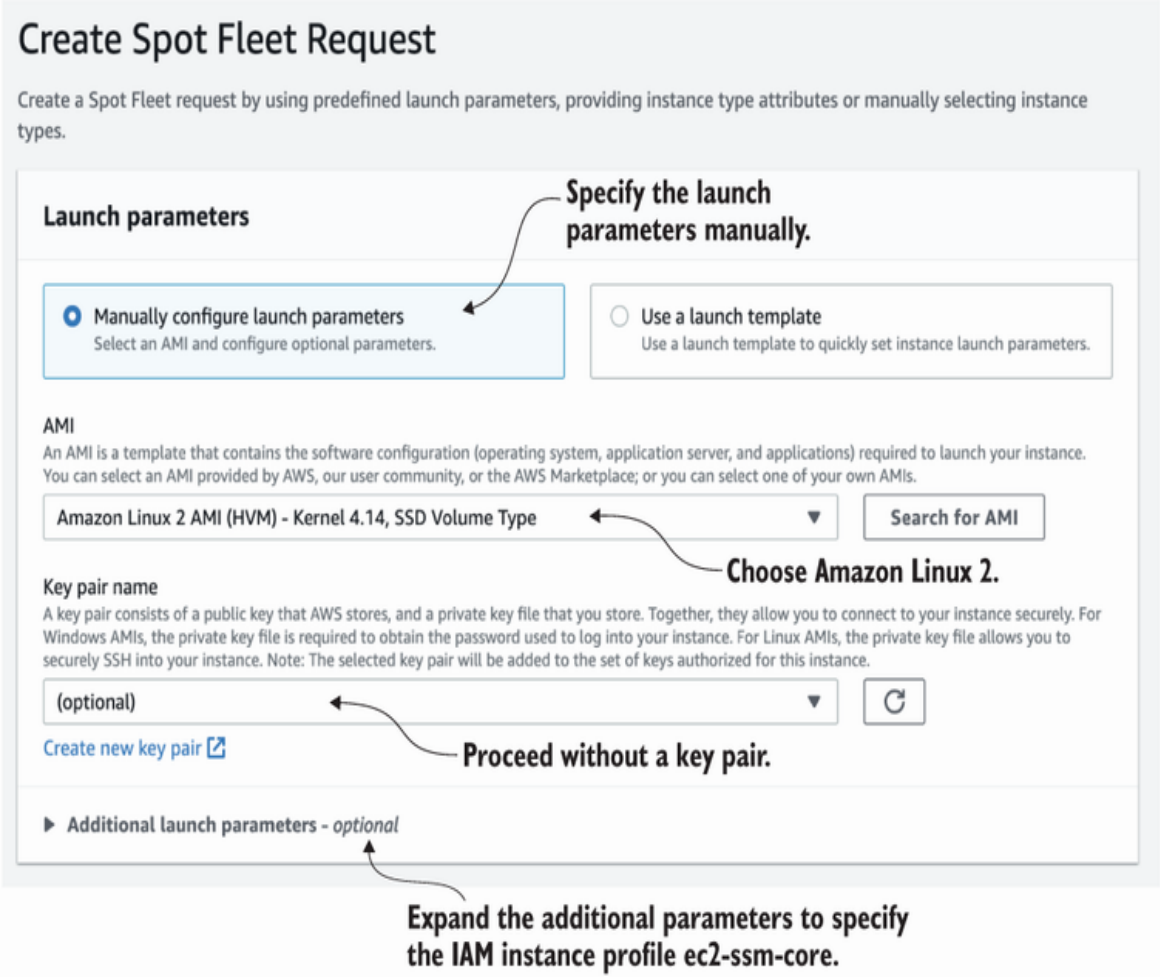


Figure 3.29 Step 1 of creating a spot fleet request

5. Choose an Amazon Linux 2 AMI.
6. Do not configure a key pair; select (optional) instead.
7. Expand the Additional Launch Parameters section.
8. Select the IAM instance profile `ec2-ssm-core` to be able to connect to the Spot Instance using the Session Manager.
9. Keep the defaults for Addition Request Details.