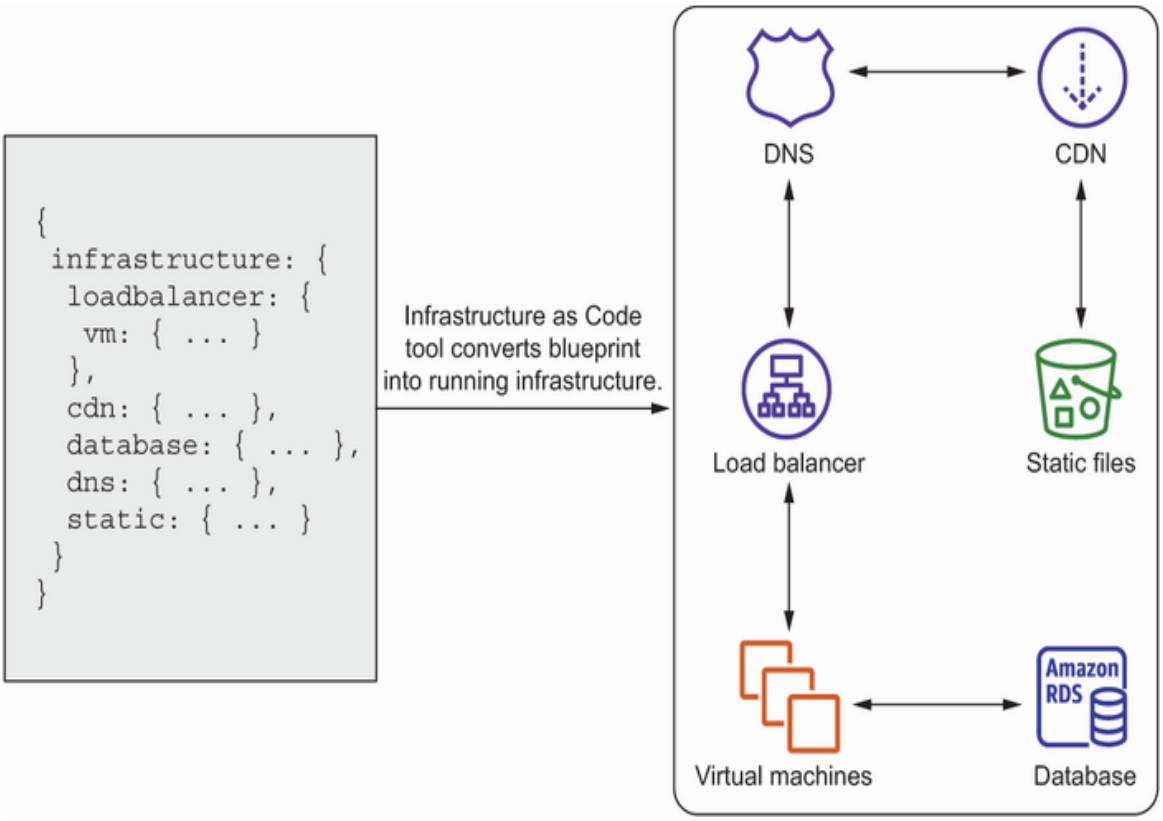


Figure 4.12 From JIML blueprint to infrastructure: Infrastructure automation

The infrastructure consists of the following:

- Load balancer (LB)
- Virtual machines (VMs)
- Database (DB)
- DNS entry
- Content delivery network (CDN)
- Storage for static files

To reduce problems with syntax, let's say JIML is based on JSON. The following JIML code creates the infrastructure shown in figure 4.12. The `$` indicates a reference to an ID.