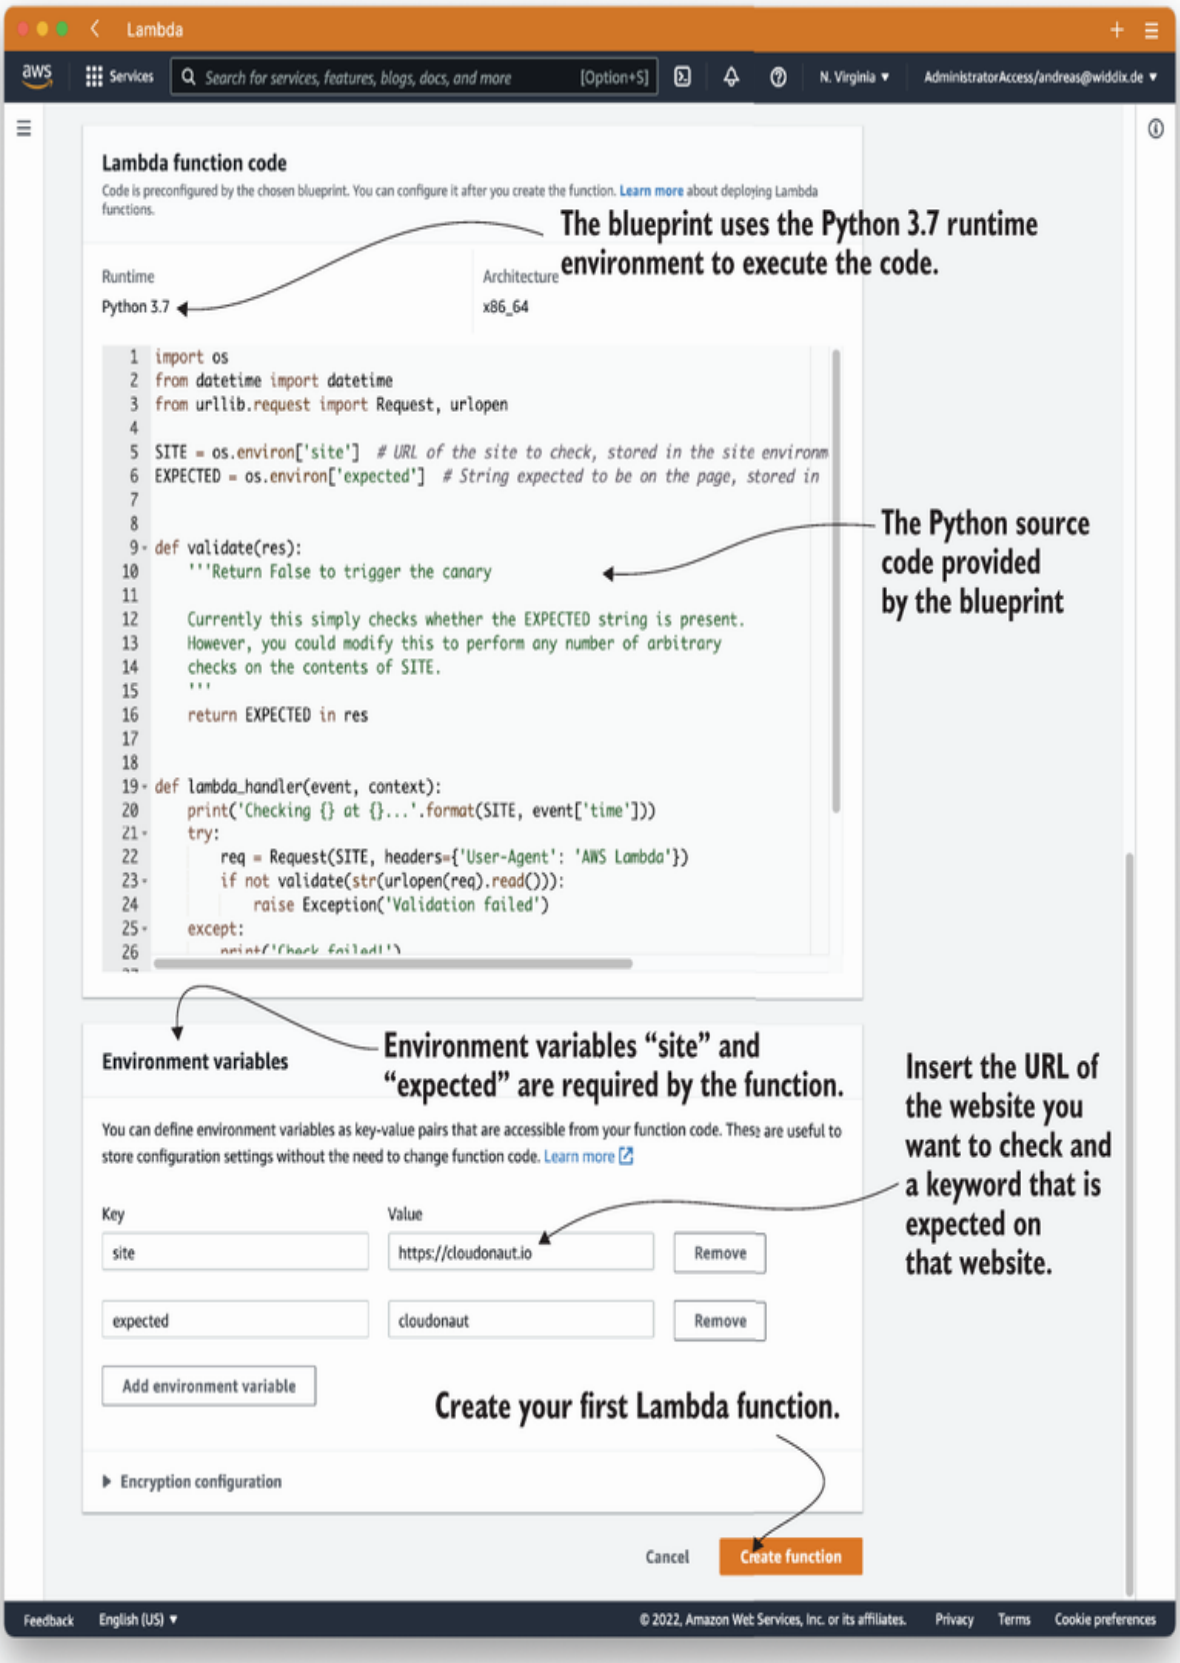

Lambda
Services
Search for services, features, blogs, docs, and more [Option+S]
N. Virginia
AdministratorAccess/andreas@widdix.de
Lambda function code
Code is preconfigured by the chosen blueprint. You can configure it after you create the function. Learn more about deploying Lambda functions.
The blueprint uses the Python 3.7 runtime environment to execute the code.
Runtime
Python 3.7
Architecture
x86_64
import os
from datetime import datetime
from urllib.request import Request, urlopen
SITE = os.environ['site'] # URL of the site to check, stored in the site environm
EXPECTED = os.environ['expected'] # String expected to be on the page, stored in
def validate(res):
'''Return False to trigger the canary
Currently this simply checks whether the EXPECTED string is present.
However, you could modify this to perform any number of arbitrary
checks on the contents of SITE.
'''
return EXPECTED in res
def lambda_handler(event, context):
print('Checking {} at {}...'.format(SITE, event['time']))
try:
req = Request(SITE, headers={'User-Agent': 'AWS Lambda'})
if not validate(str(urlopen(req).read())):
raise Exception('Validation failed')
except:
The Python source code provided by the blueprint
Environment variables
Environment variables "site" and "expected" are required by the function.
You can define environment variables as key-value pairs that are accessible from your function code. These are useful to store configuration settings without the need to change function code. Learn more
Key
Value
site
https://cloudonaut.io
Remove
expected
cloudonaut
Remove
Add environment variable
Insert the URL of the website you want to check and a keyword that is expected on that website.
Create your first Lambda function.
Encryption configuration
Cancel
Create function
Feedback
English (US)
© 2022, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences