Therefore, we are executing a function for every event that indicates the launch of a new EC2 instance. To trigger a Lambda function whenever such an event occurs, you need a rule. As illustrated in figure 6.18, the rule matches incoming events and routes them to a target, a Lambda function in our case.

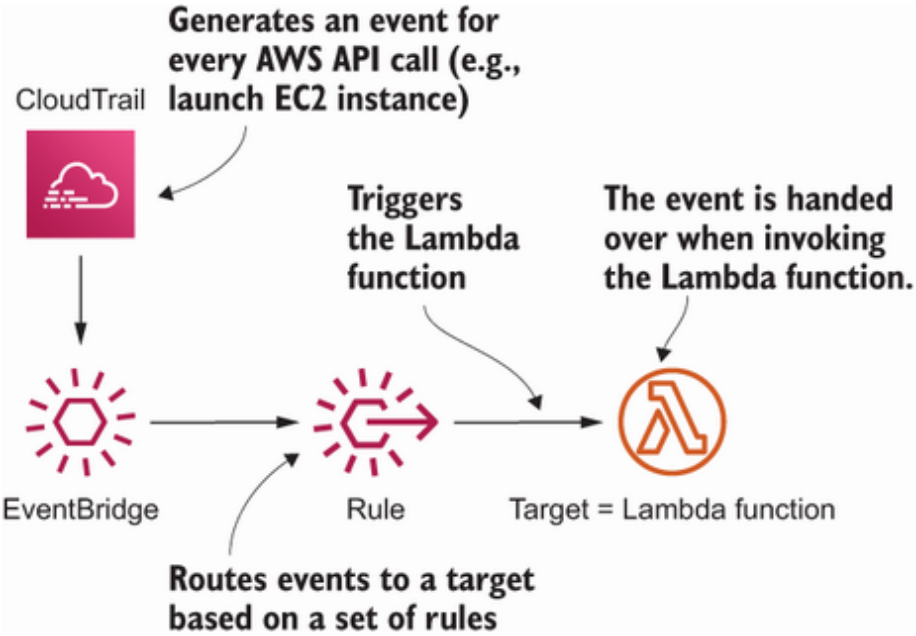


Figure 6.18 CloudTrail generates an event for every AWS API call; a rule routes the event to the Lambda function.

Listing 6.1 shows some of the event details generated by CloudTrail whenever someone launches an EC2 instance. For our case, we're interested in the following information:

- `detail-type`—The event has been created by CloudTrail.
- `source`—The EC2 service is the source of the event.
- `eventName`—The event name `RunInstances` indicates that the event was generated because of an AWS API call launching an EC2 instance.