the AWS SDK to send requests to the REST API. You must integrate DynamoDB into your application; you can't take an existing application that uses an SQL database and run it on DynamoDB. To use DynamoDB, you need to write code!

12.2 Creating tables

Each DynamoDB table has a name and organizes a collection of items. An *item* is a collection of attributes, and an *attribute* is a name-value pair. The attribute value can be scalar (number, string, binary, Boolean), multivalued (number set, string set, binary set), or a JSON document (object, array). Items in a table aren't required to have the same attributes; there is no enforced schema. Figure 12.3 demonstrates these terms.

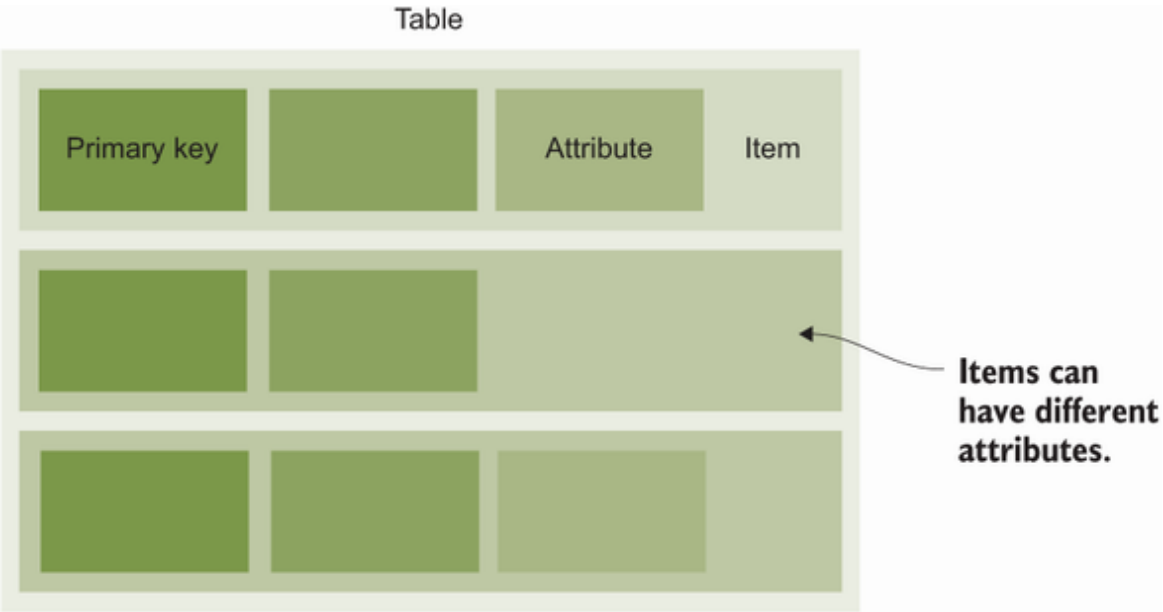


Figure 12.3 DynamoDB tables store items consisting of attributes identified by a primary key.