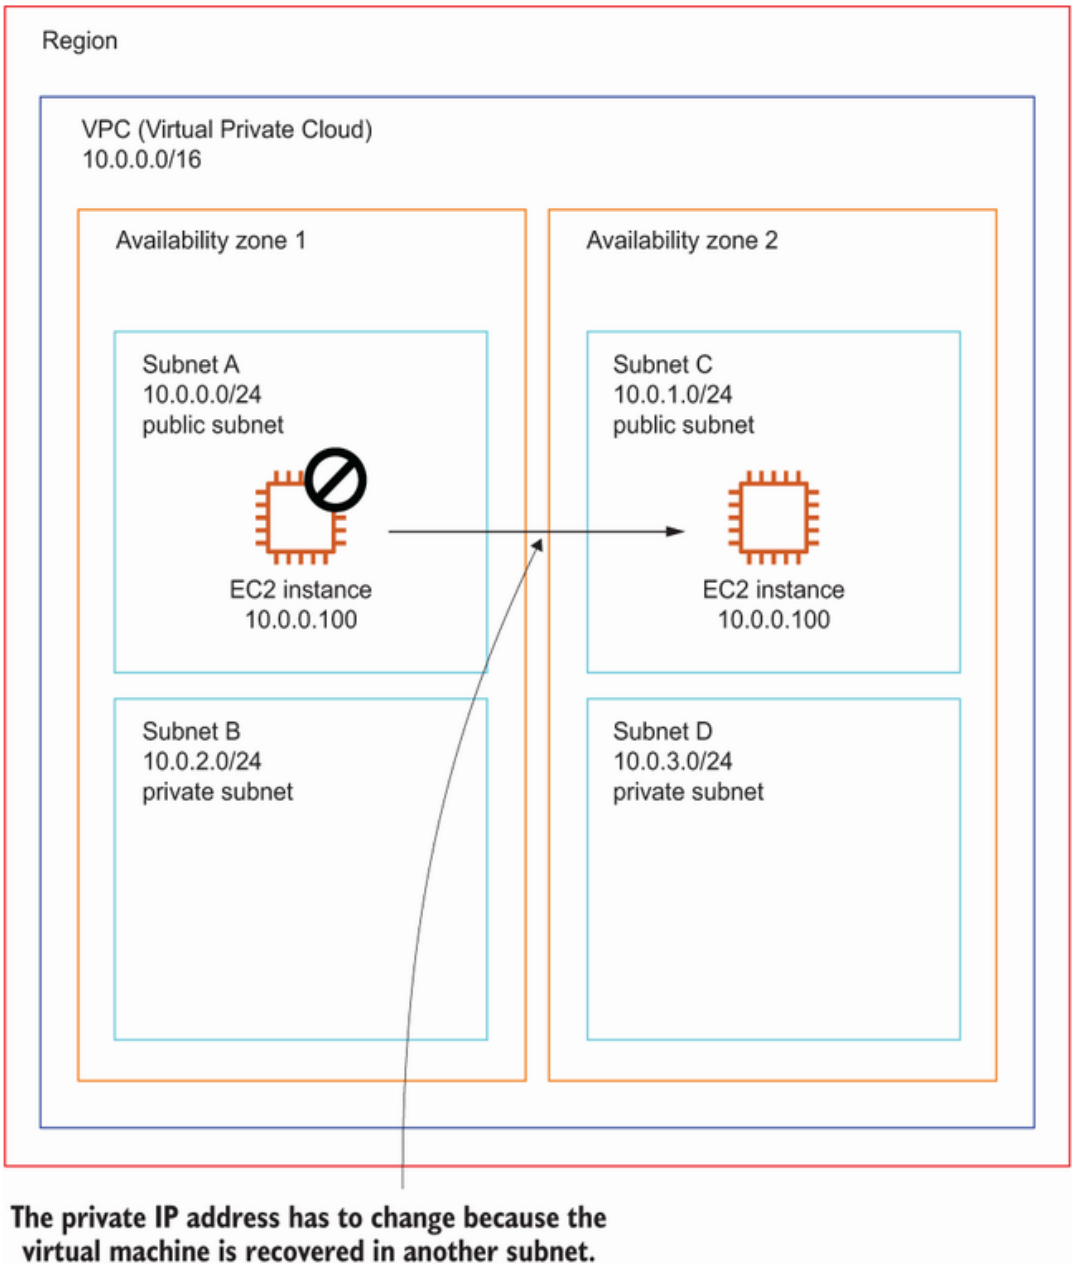


Figure 13.7 The virtual machine starts in another subnet in case of a failover and changes the private IP address.

By default, you also can't use an Elastic IP as a public IP address for a virtual machine launched by autoscaling. The requirement for a static endpoint to receive requests is common, though. For the use case of a Jenkins server, developers want to bookmark an IP address or a hostname to reach the web interface. Different possibilities exist for providing a static endpoint when using