14.2.2 Architecture of the URL2PNG application

You'll now create a basic but decoupled piece of software named URL2PNG that renders a PNG from a given web URL. You'll use Node.js to do the programming part, and you'll use SQS as the message queue implementation. Figure 14.7 shows how the URL2PNG application works.

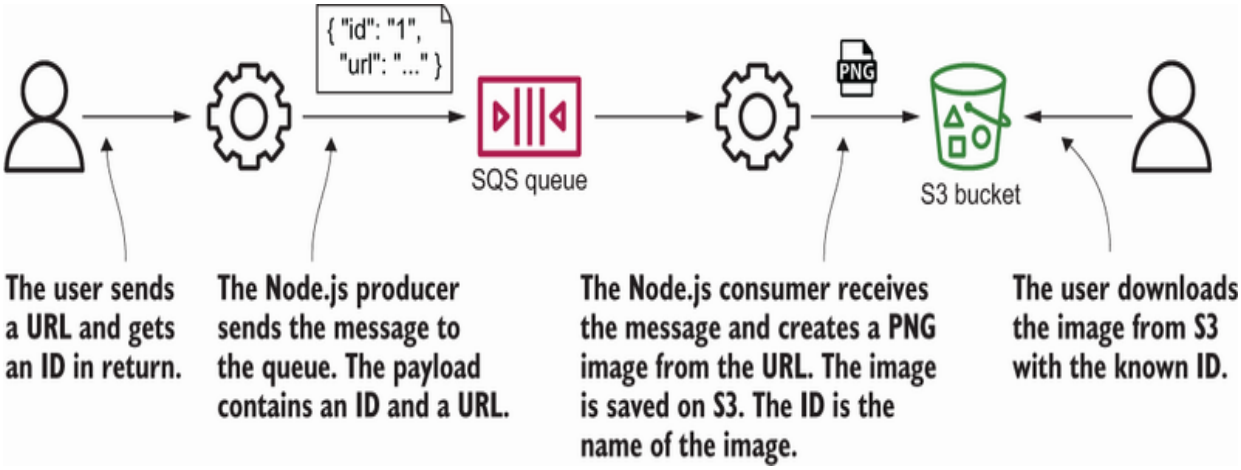


Figure 14.7 Node.js producer sends a message to the queue. The payload contains an ID and URL.

On the message producer side, a small Node.js script generates a unique ID, sends a message to the queue with the URL and ID as the payload, and returns the ID to the user. The user now starts checking whether a file is available on the S3 bucket using the returned ID as the filename.

Simultaneously, on the message consumer side, a small Node.js script reads a message from the queue, generates the screenshot of