1. Upload the raw image to S3.
2. Modify the item in DynamoDB.
3. Send an SQS message to trigger processing.

Figure 16.14 shows this flow.

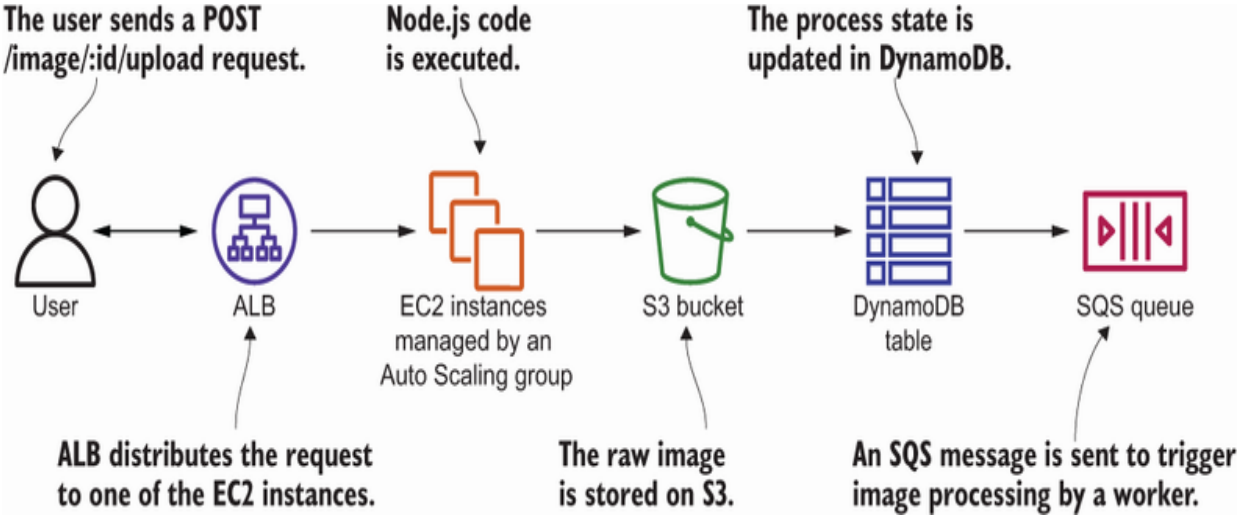


Figure 16.14 Uploading a raw image to Imagery and triggering image processing

The next code listing shows the implementation of these steps.

Listing 16.4 `POST /image/:id/upload` uploads an image (server/server.js)

```
function uploadImage(image, part, response) {
  const rawS3Key = 'upload/' + image.id + '-'
➥ + Date.now();                                          ①
  s3.putObject({                                          ②
    'Bucket': process.env.ImageBucket,                    ③
    'Key': rawS3Key,
    'Body': part,                                         ④
    'ContentLength': part.byteCount
  }, function(err, data) {
    if (err) { /* [...] */ } else {
```