- Autoscaling and CloudWatch to scale the number of EC2 instances based on the current CPU load of all running virtual machines

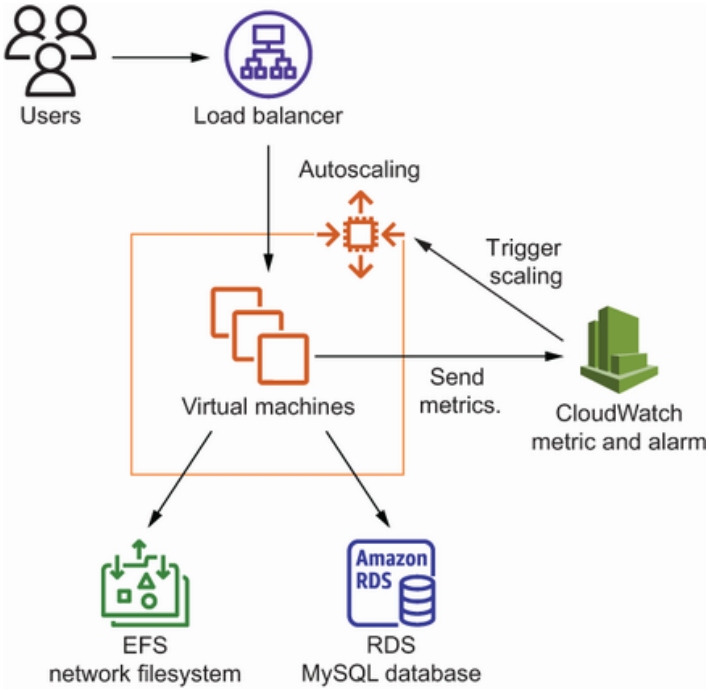


Figure 17.6 Autoscaling web servers running WordPress, storing data on RDS and EFS, decoupled with a load balancer scaling based on load

As usual, you'll find the code in the book's code repository on GitHub: https://github.com/AWSinAction/code3. The CloudFormation template for the WordPress example is located in /chapter17/wordpress.yaml.

Execute the following command to create a CloudFormation stack that spins up the scalable WordPress setup. Replace `$Password` with your own password consisting of eight to 30 letters and digits.

```
$ aws cloudformation create-stack --stack-name wordpress \
➥ --template-url https:/ /s3.amazonaws.com/\
➥ awsinaction-code3/chapter17/wordpress.yaml --parameters \
➥ "ParameterKey=WordpressAdminPassword,ParameterValue=$Password" \
➥ --capabilities CAPABILITY_IAM
```

It will take up to 15 minutes for the stack to be created. This is a perfect time to grab some coffee or tea. Log in to the AWS Management Console, and navigate to the AWS CloudFormation service to monitor the process of the CloudFormation stack