`"`, and so on. The following listing shows some HTML being assigned to a variable that is rendered to the browser.

Listing 3.9 HTML assigned to the output variable that is rendered

```
@{
    var output = "<p>This is a paragraph.</p>";
}
@output
```

The resulting HTML that gets generated is

```
&lt;p&gt;This is a paragraph.&lt;/p&gt;
```

Figure 3.1 demonstrates how this appears in the browser.

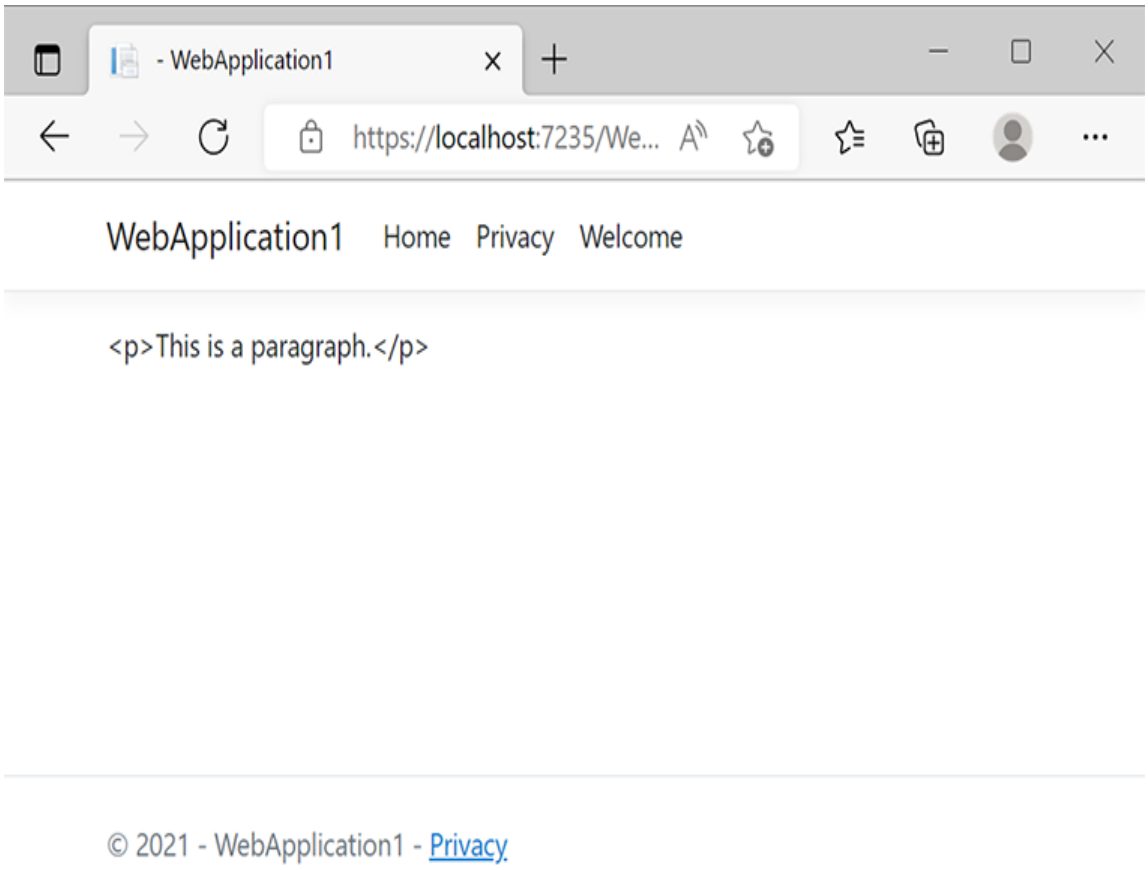


Figure 3.1 Non-ASCII and special HTML characters are encoded for output by default.