❶ The PageModel type is referenced by the @model directive.

❷ The SaleEnds property of the PageModel is accessible via the special Model property of the Razor page.

Unlike `ViewData`, which is weakly typed, you get IntelliSense support for `PageModel` properties, as you can see in figure 3.9, which shows IntelliSense kicking into life in VS Code to help with code completion.

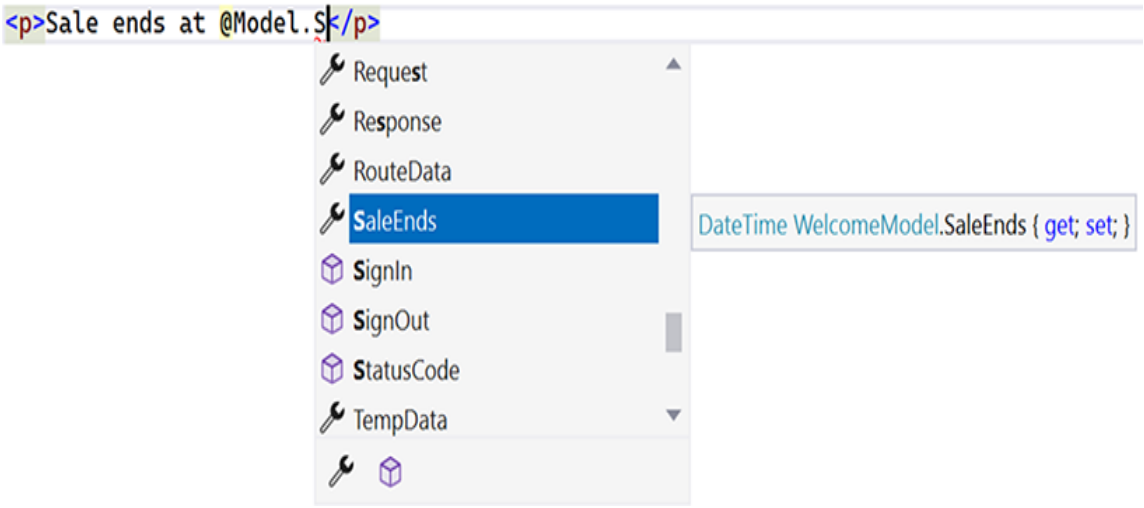


Figure 3.9 `PageModel` properties are supported by IntelliSense.

This is the primary reason `PageModel` properties are recommended over `ViewData` as a mechanism for passing data to pages. Tooling support in both Visual Studio and VS Code makes you more productive and minimizes the chances of errors creeping into your code.

3.4.3 The PageModel as a controller

The primary role of a controller is to process requests. Request processing in a `PageModel` is performed within *handler methods*. For readers familiar with MVC frameworks that support them, `PageModel` handler methods are analogous to controller actions. By convention, handler method selection is based on matching the name of the HTTP method that was used for the request with the name of the handler method using the `On[method]` pattern with `Async` appended optionally to denote that the method is intended to run asynchronously.