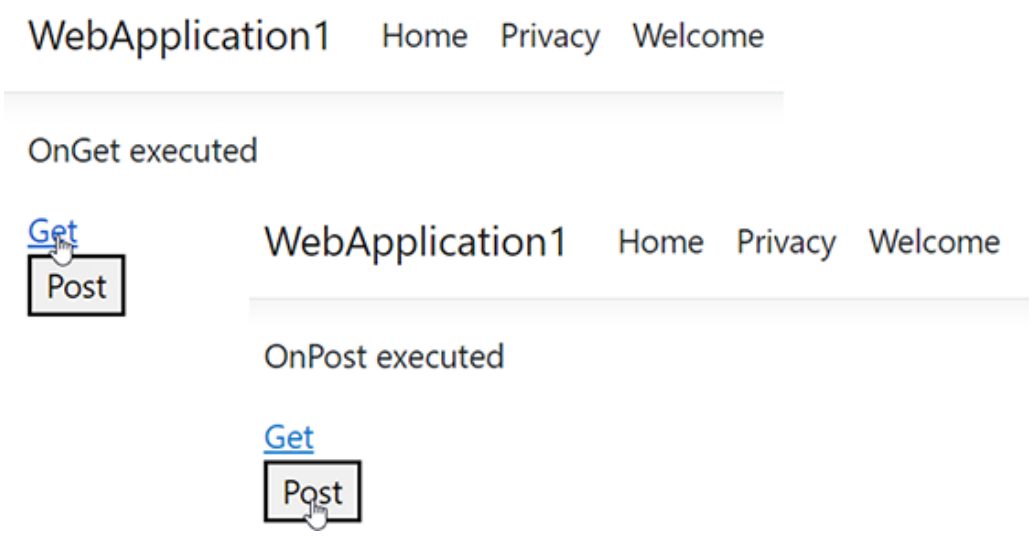


Figure 3.10 Handler methods are selected by matching their name to the HTTP method.

Listing 3.28 Welcome page including mechanisms for generating `GET` and `POST`

```
@page
@model WebApplication1.Pages.WelcomeModel                ❶
@{
}
<p>@Model.Message</p>                                    ❷
<a asp-page="/Welcome">Get</a>                           ❸
<form method="post"><button>Post</button></form>         ❹
```

❶ The WelcomeModel is referenced via the @model directive.

❷ The WelcomeModel's Message property is accessed via the Model property of the page.

❸ The anchor tag helper causes a GET request.

❹ Submitting the form causes a POST request.

HANDLER METHOD PARAMETERS

Handler methods can take parameters. Data passed in the URL will be bound to handler method parameters based on a match between the parameter's name and the name associated with the URL data item. To understand how this works, take a look at the next listing, where the `OnGet` method has been altered to accept a