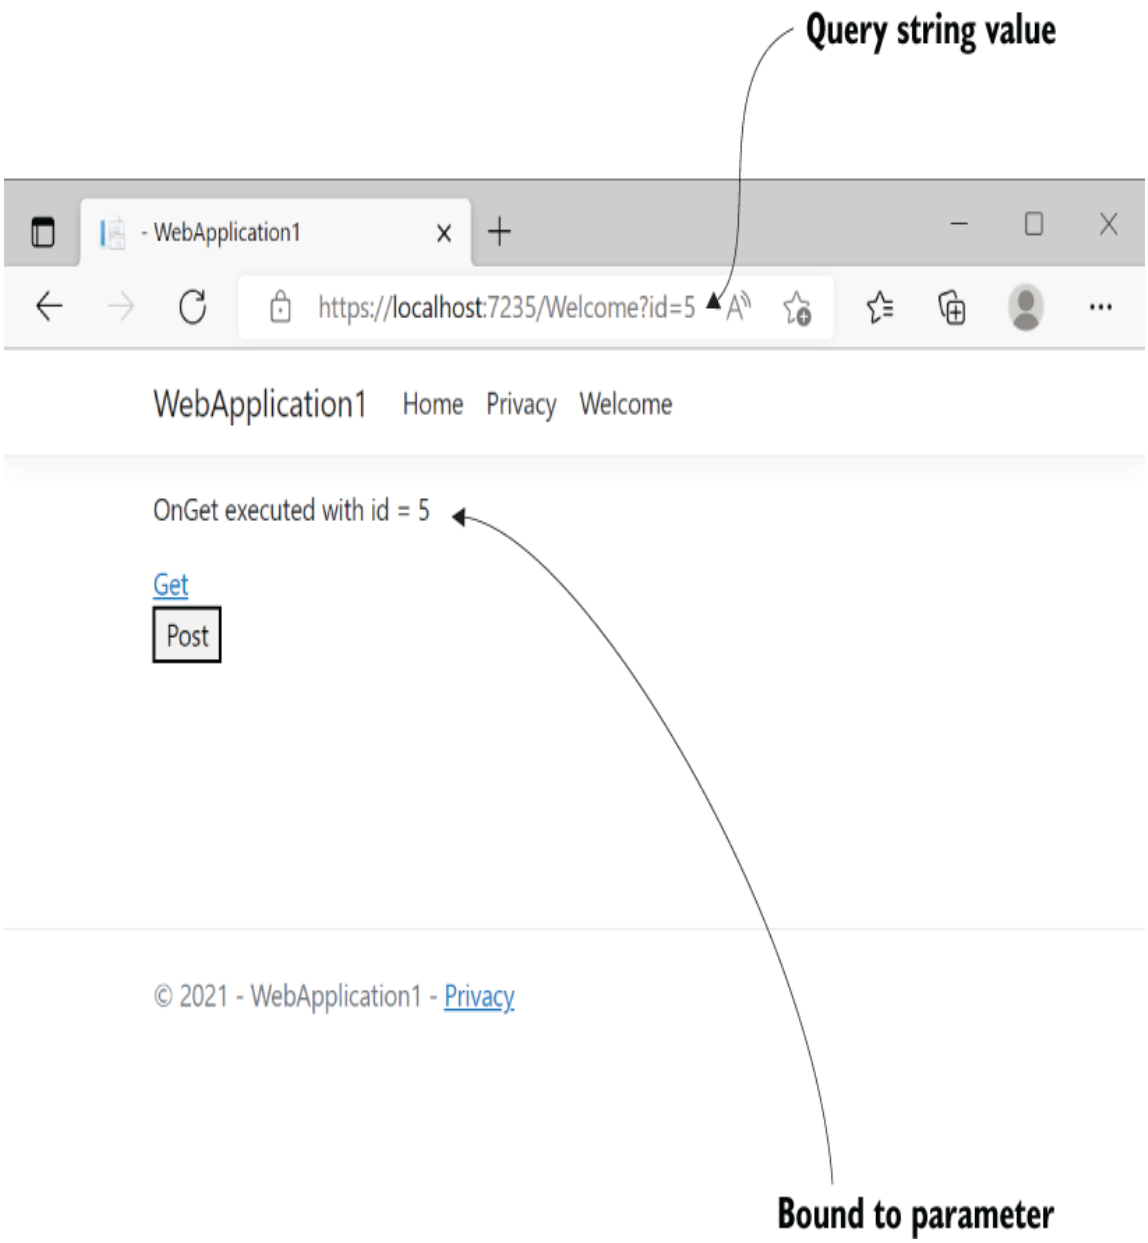


Figure 3.11 The query string value is bound to the parameter based on matching their names.

The magic that is responsible for matching incoming data to parameters is called *model binding*. I go into detail on model binding in chapter 5 when we look at working with forms.

NAMED HANDLER METHODS