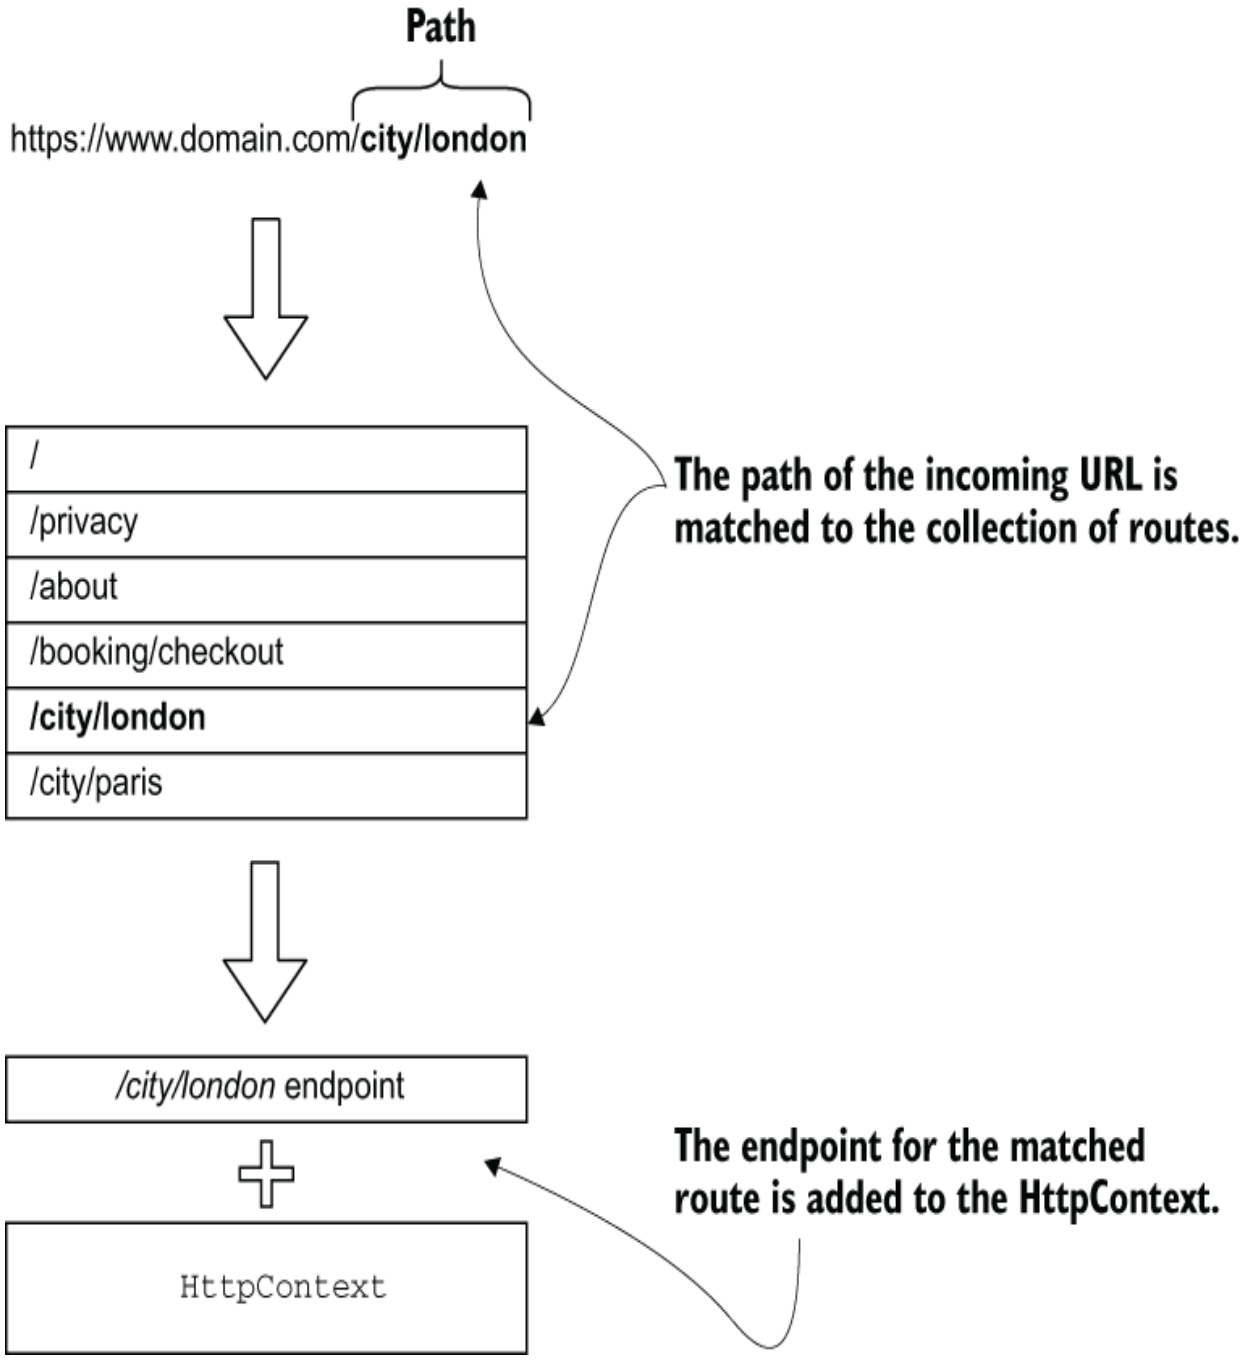


Figure 4.2 The path of the incoming URL is matched to a collection of routes. The endpoint related to the matched route is added to the `HttpContext`.