Now if you navigate to /City, the default value is displayed (figure 4.6).

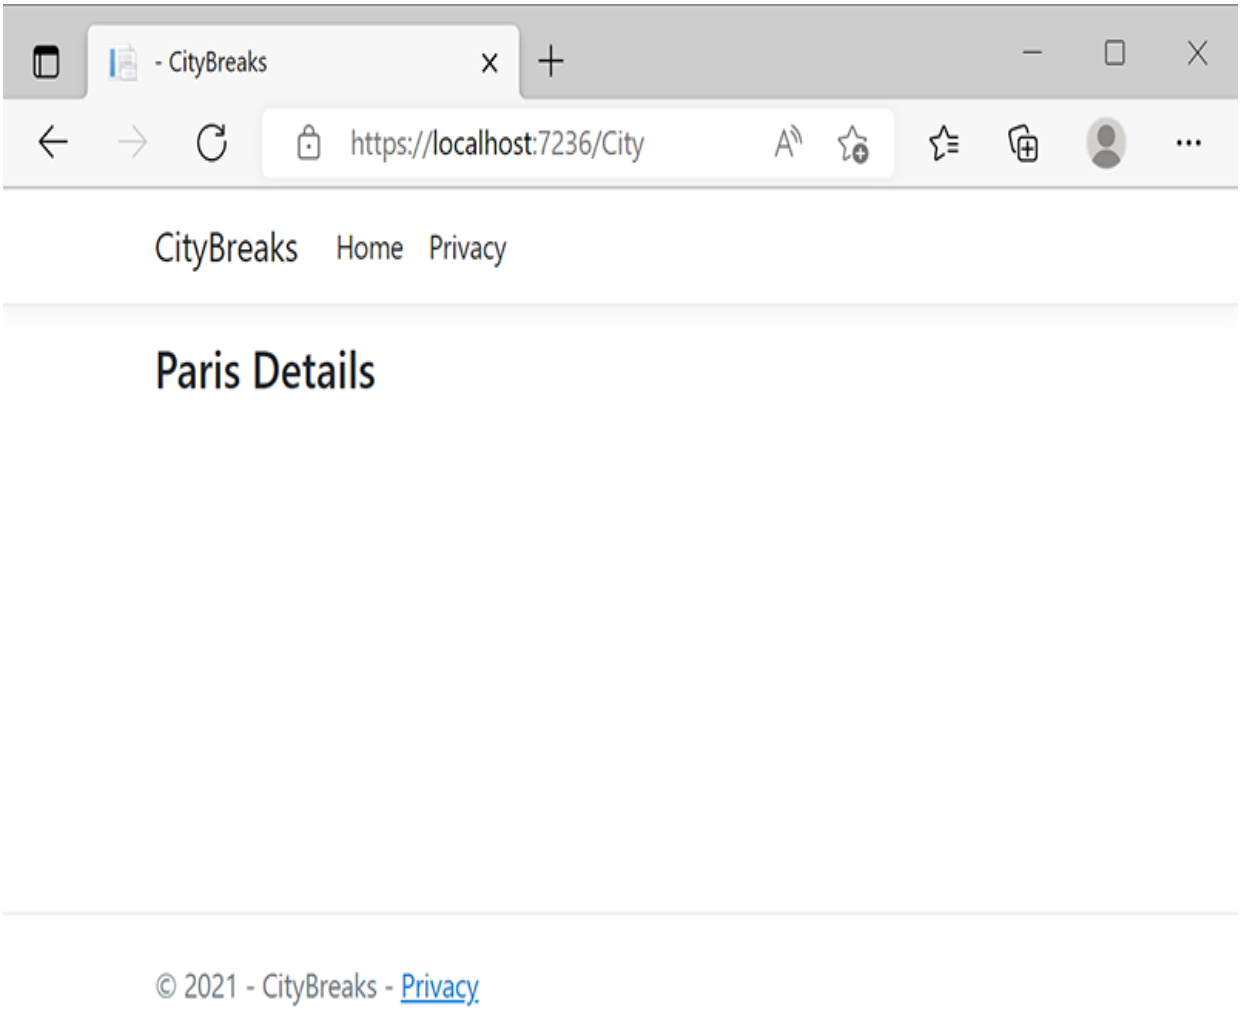


Figure 4.6 Default values can be assigned to route parameters.

4.2.3 Binding route data to handler parameters

You will recall from the previous chapter that query string values in URLs are automatically bound to parameters in `PageModel` handler methods if their names match. The same is true of route data. If a route parameter name matches, the incoming value is automatically assigned to a handler method parameter. You can then assign the parameter value to a `PageModel`