which will generate the `href` value. Consequently, the rendered HTML for `<a asp-page="/Index">Home</a>` will be `<a href="/FindMe">Home</a>`.

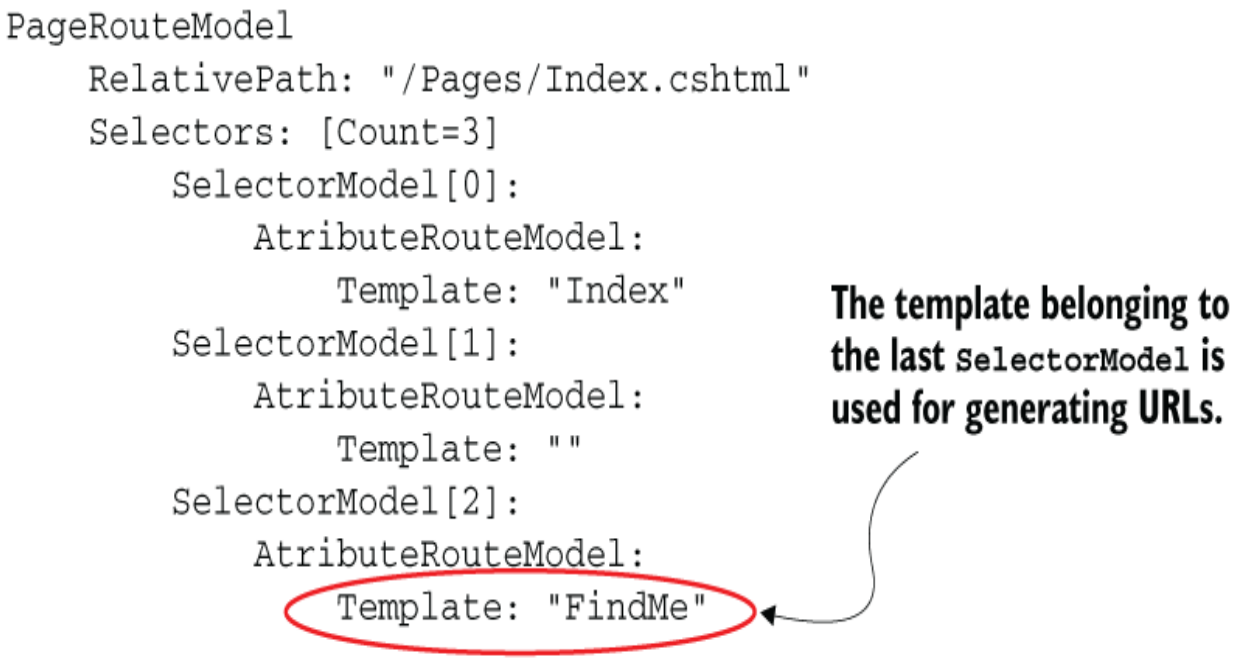


Figure 4.7 The template belonging to the last `SelectorModel` is used for generating URLs.

The `page-handler` attribute is used to specify the name of the named handler method that should be executed. This works in the same way it did in the form tag helper you saw in the last chapter when I discussed named handlers with the use of a `Search` handler and a `Register` handler. By default, the value passed to the `page-handler` attribute is applied to the query string with a key named `"handler"`:

```
?handler=Search
```