❶ Include a using directive for Microsoft.Extensions.Primitives, so you can reference the StringValues type without having to use its fully qualified name.

❷ Add a public string property named Message.

❸ Add an OnPost handler to process POST requests.

❹ Check the Request.Form collection to see if an item with the key of "cityName" has a value.

❺ If it does, include it as part of the value assigned to the Message property.

Run the application, navigate to /city-manager/create (remember the routing customizations you have already applied), and enter a value into the input. The value is included in the rendered message (figure 5.3).

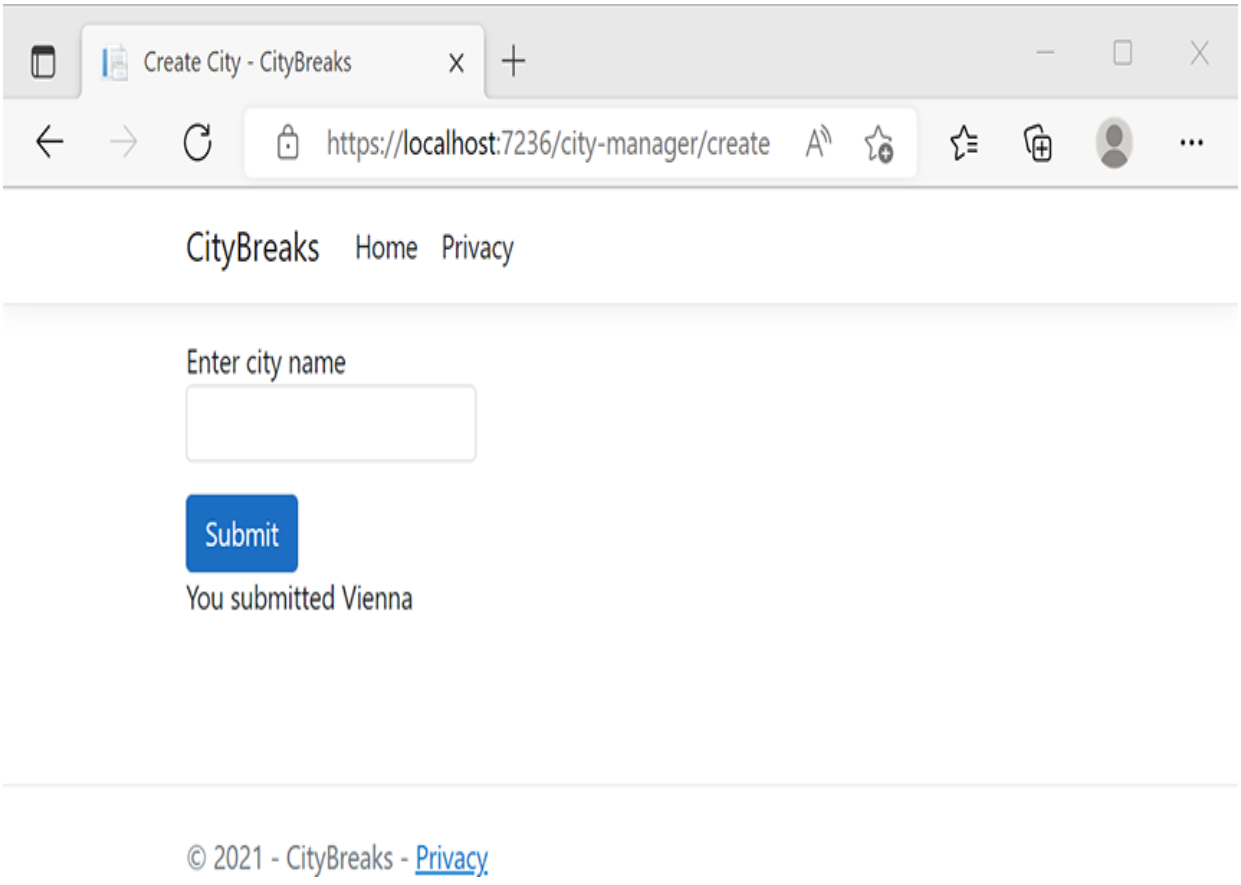


Figure 5.3 The posted value is successfully rendered to the browser.

The example in listing 5.2 demonstrates how to use the value assigned to the `name` attribute of the input (`"cityName"`) as a string-based index to