```
    }
}
```

❶ Add the cityName parameter to the OnPost handler method.

❷ Include the parameter value in the value assigned to Message.

When you run this page again, you should see no difference in the output. The value you entered into the form should be incorporated into the rendered `Message`.

Once the `OnPost` handler method has been selected by the routing system, the model-binding system does the following (depicted in figure 5.5):

1. Examines the names of the handler method parameters
2. Searches the binding sources in the incoming request for a value with a matching key
3. If a match is found, it attempts any type conversion required from the raw string data presented by the request
4. Assigns the resulting value to the parameter if the conversion is successful

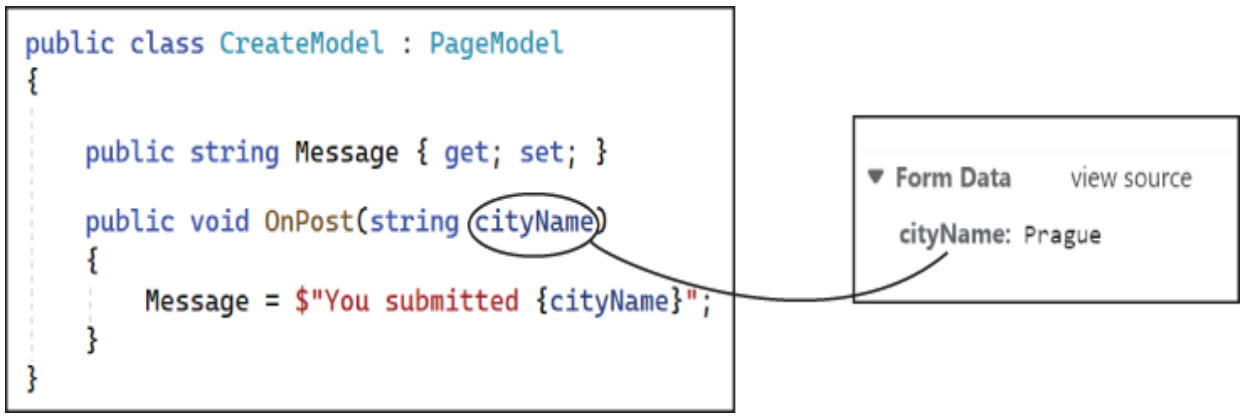


Figure 5.5 Handler parameters are matched to incoming HTTP values based on their names.