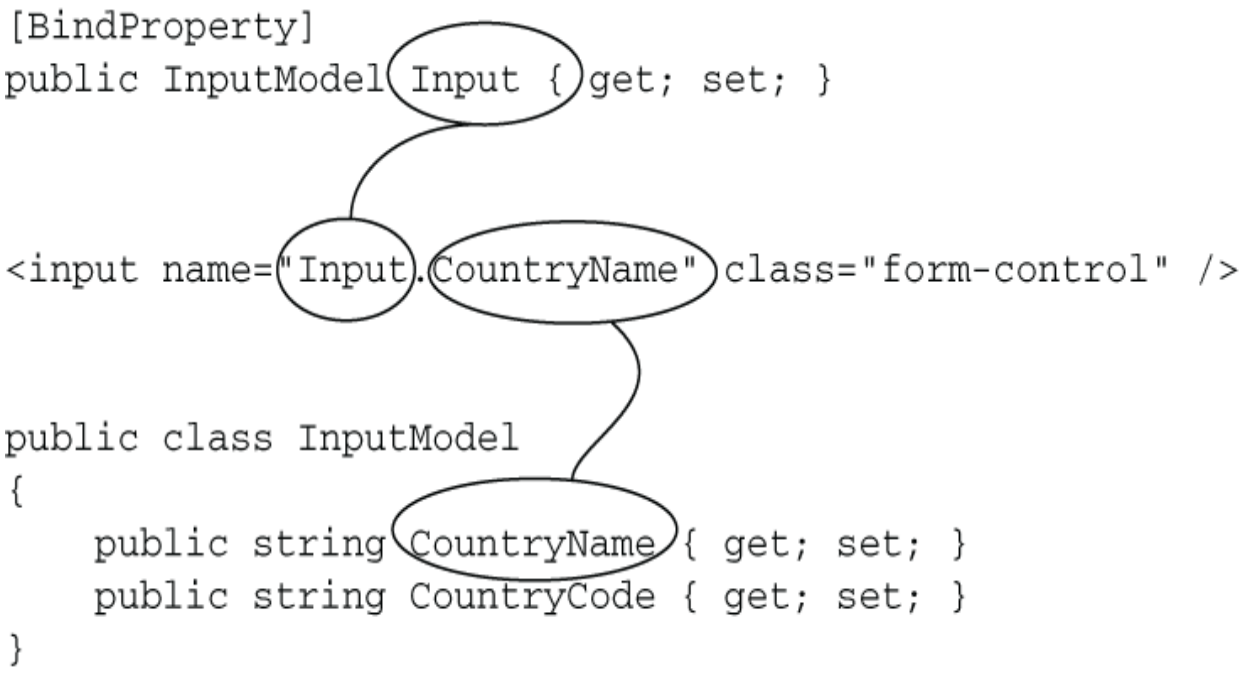


Figure 5.6 Using dot notation to ensure binding works with complex objects

To put this into practice, amend the Create.cshtml file to accommodate the following code.

Listing 5.11 The Create Country form

```
@page
@model CityBreaks.Pages.CountryManager.CreateModel
@{
}

<h4>Create Country</h4>

<div class="row">
    <div class="col-md-4">
        <form method="post">
            <div class="form-group">
               <label for="Input.CountryName"                    ❶
               ➥ class="control-label">Name</label>             ❶
               <input name="Input.CountryName"                   ❶
               ➥ class="form-control" />                        ❶
            </div>
            <div class="form-group">
```