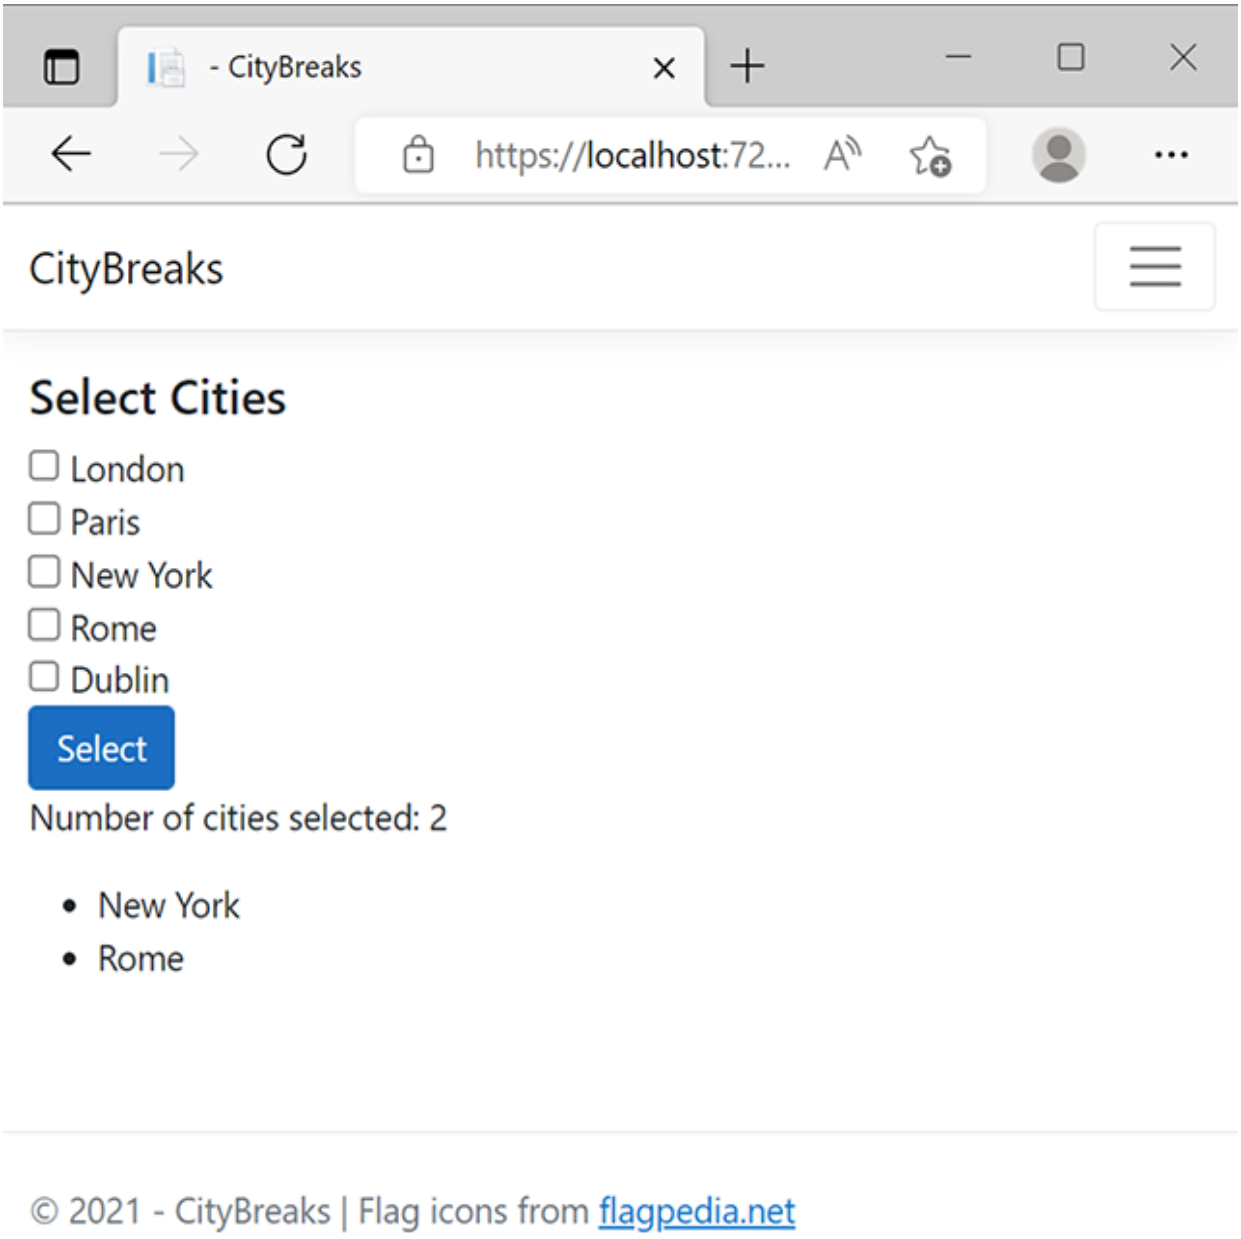


Figure 5.9 Binding multiple selections to a collection

The key to getting this example working is ensuring all the check boxes share the same name attribute (`SelectedCities`) and the value assigned to the name attribute is assigned to the binding target in the `PageModel` class. Another point to note: if you are going to refer to a collection in the Razor page, it is useful to initialize it as part of its