retained in the form controls (figure 5.11).

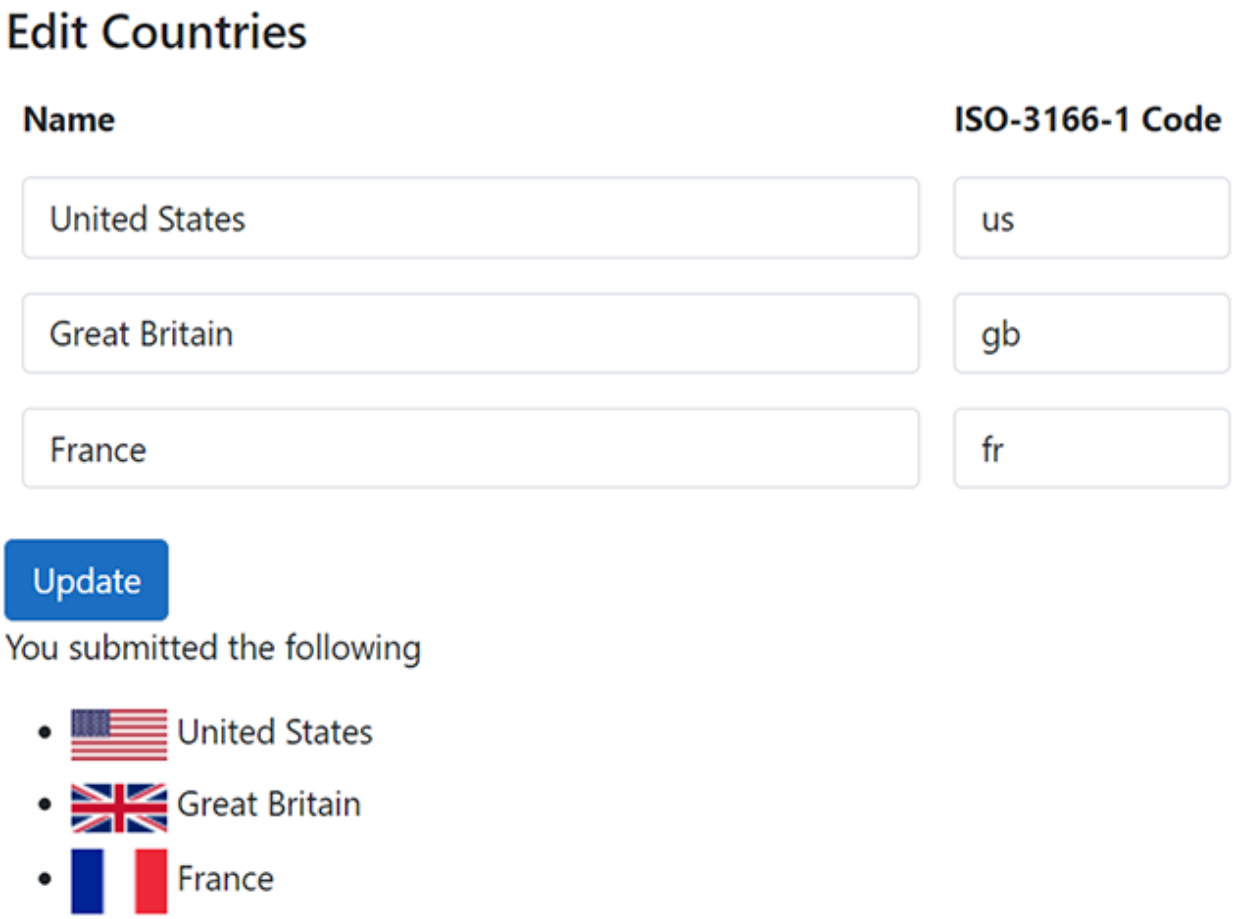


Figure 5.11 The updated values are rendered to the browser.

By now you should have a clear idea of how model binding works with handler parameters and public properties of a `PageModel` or an input model for simple values and complex objects. So how should you choose between binding to handler parameters and `PageModel` properties?

There is no single correct answer to this question. It will very much depend on individual circumstances. As a brief summary of what the text has covered so far, table 5.1 provides a comparison of handler parameters and `PageModel` properties as binding targets, so you can make an informed choice that works in your specific scenario.