set to the value assigned to the property. The following simple code is all that is required to generate a fully wired-up input element:

```
<input asp-for="CityName" />
```

The rendered output from the line above is

```
<input type="text" id="CityName" name="CityName" value="" />
```

In this way, you achieve a kind of two-way binding between the form control and the public `PageModel` property, or the binding source and its target (figure 6.1).

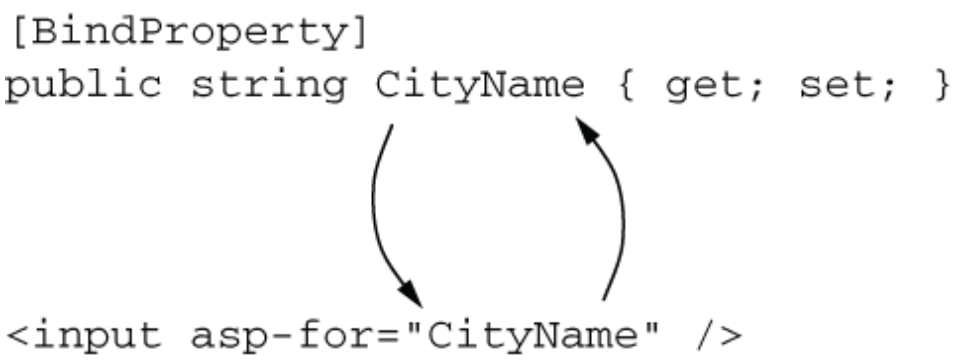


Figure 6.1 Using tag helpers achieves a two-way binding between binding sources and their targets.

The existing label element in your Create City page can be replaced with a tag helper. The current HTML `for` attribute needs to be prefixed with `asp-` to activate the tag helper. Just like the input tag helper, the value passed in to the `for` attribute should be the name of the model property:

```
<label asp-for="CityName"></label>
```