6.2.3 Formatting the rendered date or time value

When reviewing the form you just created for adding new properties, you might have noticed that the HTML 5 `datetime-local` input type, generated for a `DateTime PageModel` property, supports setting values to the millisecond (figure 6.3). However, it rarely makes sense to expose this capability to users.

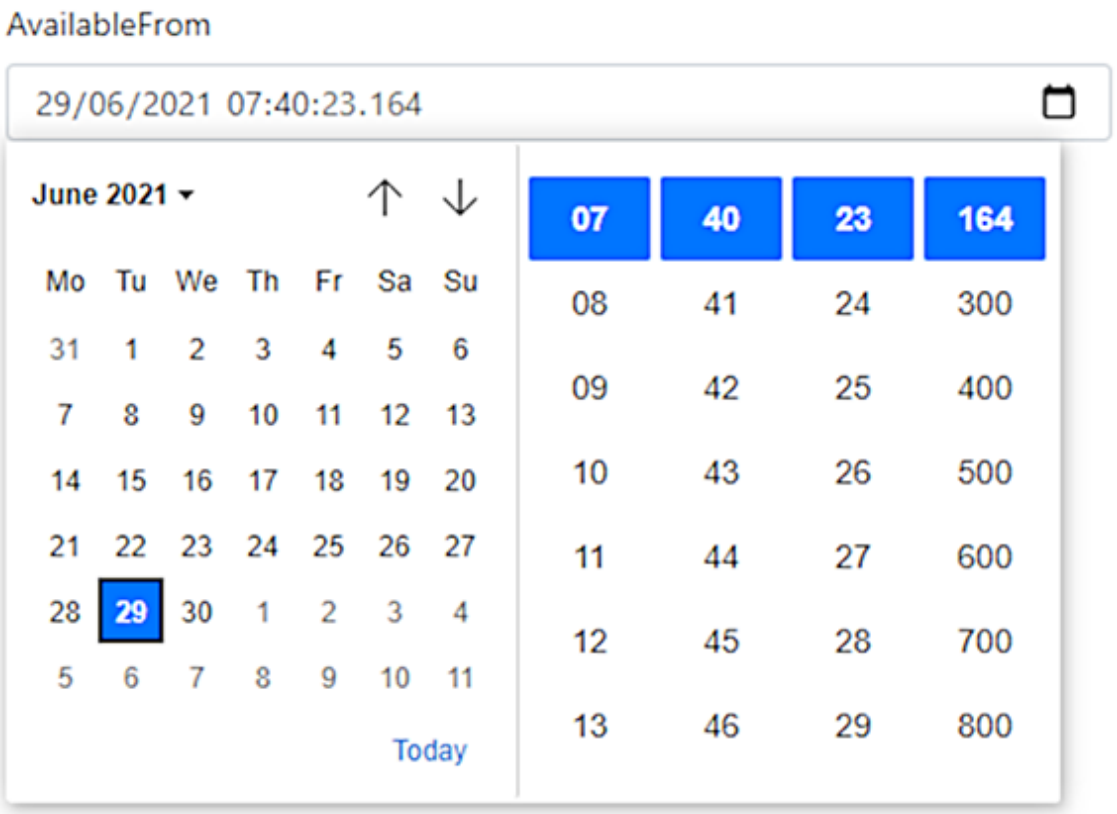


Figure 6.3 The default binding of a `Date-Time` value activates the capability to set milliseconds in the `datetime-local` control.

By default, if a value is assigned to the bound `DateTime` property, its millisecond portion is exposed to the browser control, activating the capability to set this part of the value. You can control this by applying a format string to the `DateTime` value. The `DisplayFormat` attribute