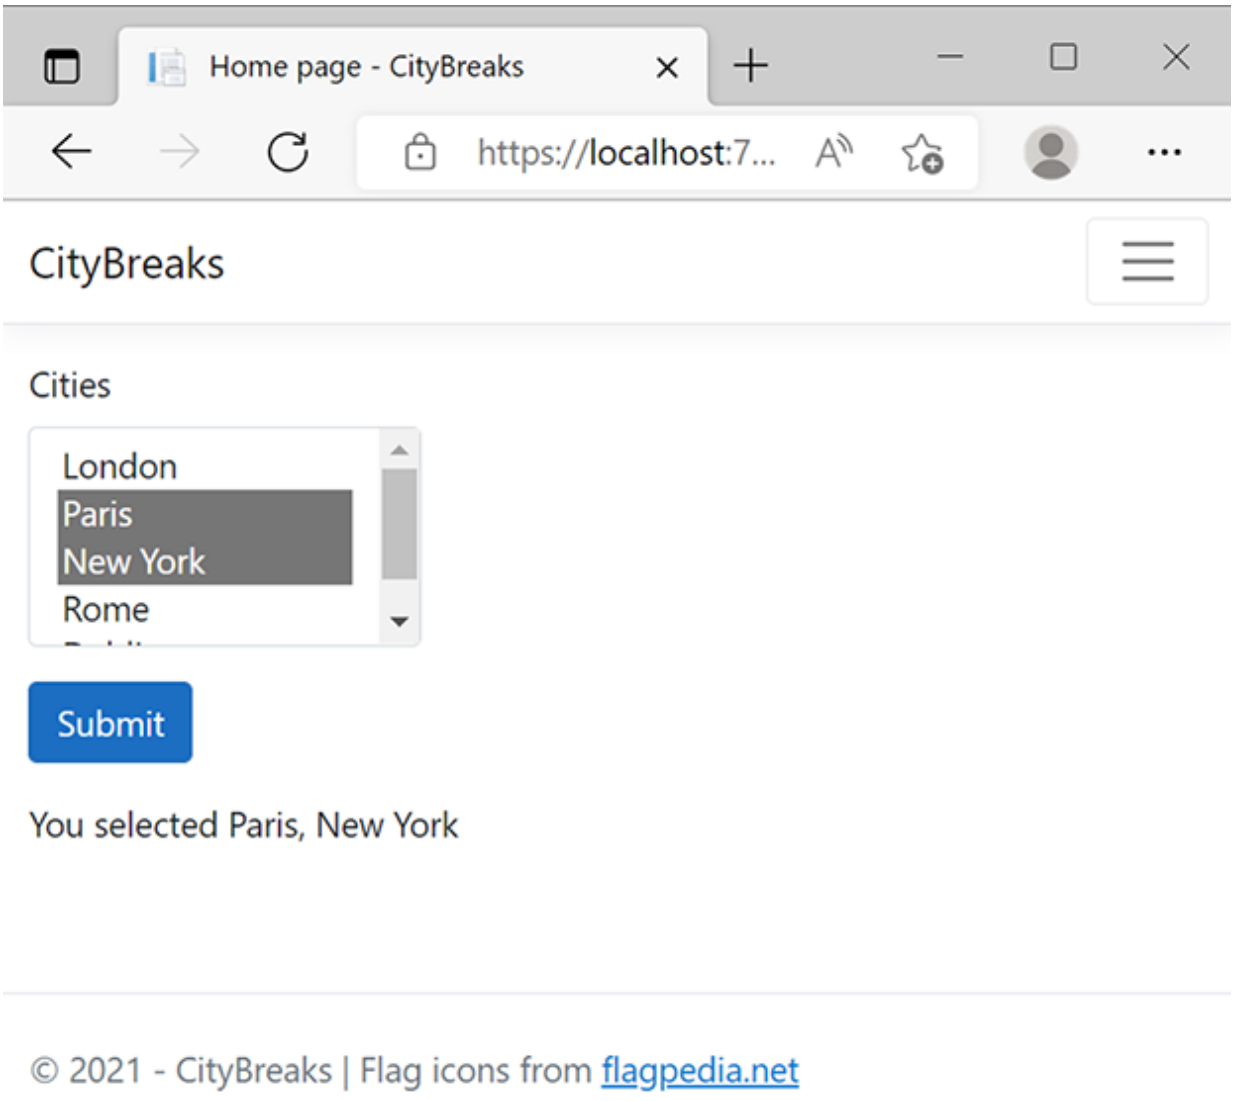


Figure 6.11 The selected options remain selected and are included in the rendered message.

6.3.3 Working with OptGroups

The `SelectList` class includes another constructor that enables you to specify the name of a property that should be used to represent an HTML `optgroup` element, the `DataGroupField`, which is used to group related options together within the list of options displayed to the user.