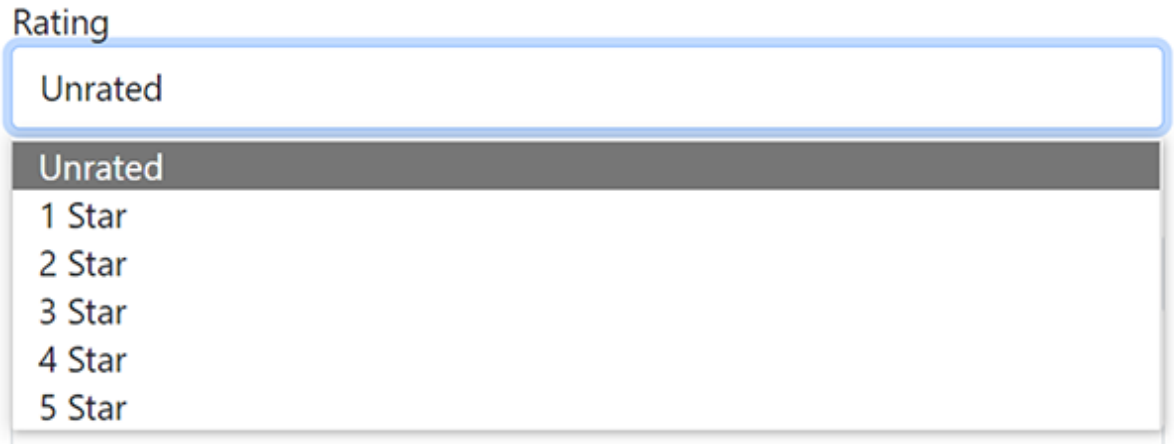


Figure 6.14 The `Display` names are automatically applied to the option text.

Now that we have covered the most common issues that arise when working with select lists, we can move on to look at check boxes and radio controls. While the input tag helper targets them, aspects of their behavior are unique and warrant attention.

6.4 Check boxes and radio controls

We have already covered some aspects of working with check boxes in Razor Pages forms, but it is worth reprising that knowledge, while we explore working with a similar control: the radio button. Check boxes are designed to enable users to make zero or more selections from predefined options—like select lists. Check boxes can stand alone to represent a Boolean choice, and when this is the requirement, you should bind a `PageModel` property to them that is either a Boolean or a string with a value that can be converted to a Boolean (e.g., “true”/“false”). Check boxes can also be grouped together by sharing the same name to enable the user to make multiple choices—like the list box you just worked with. You did this when looking at model binding to simple collections in the previous chapter.