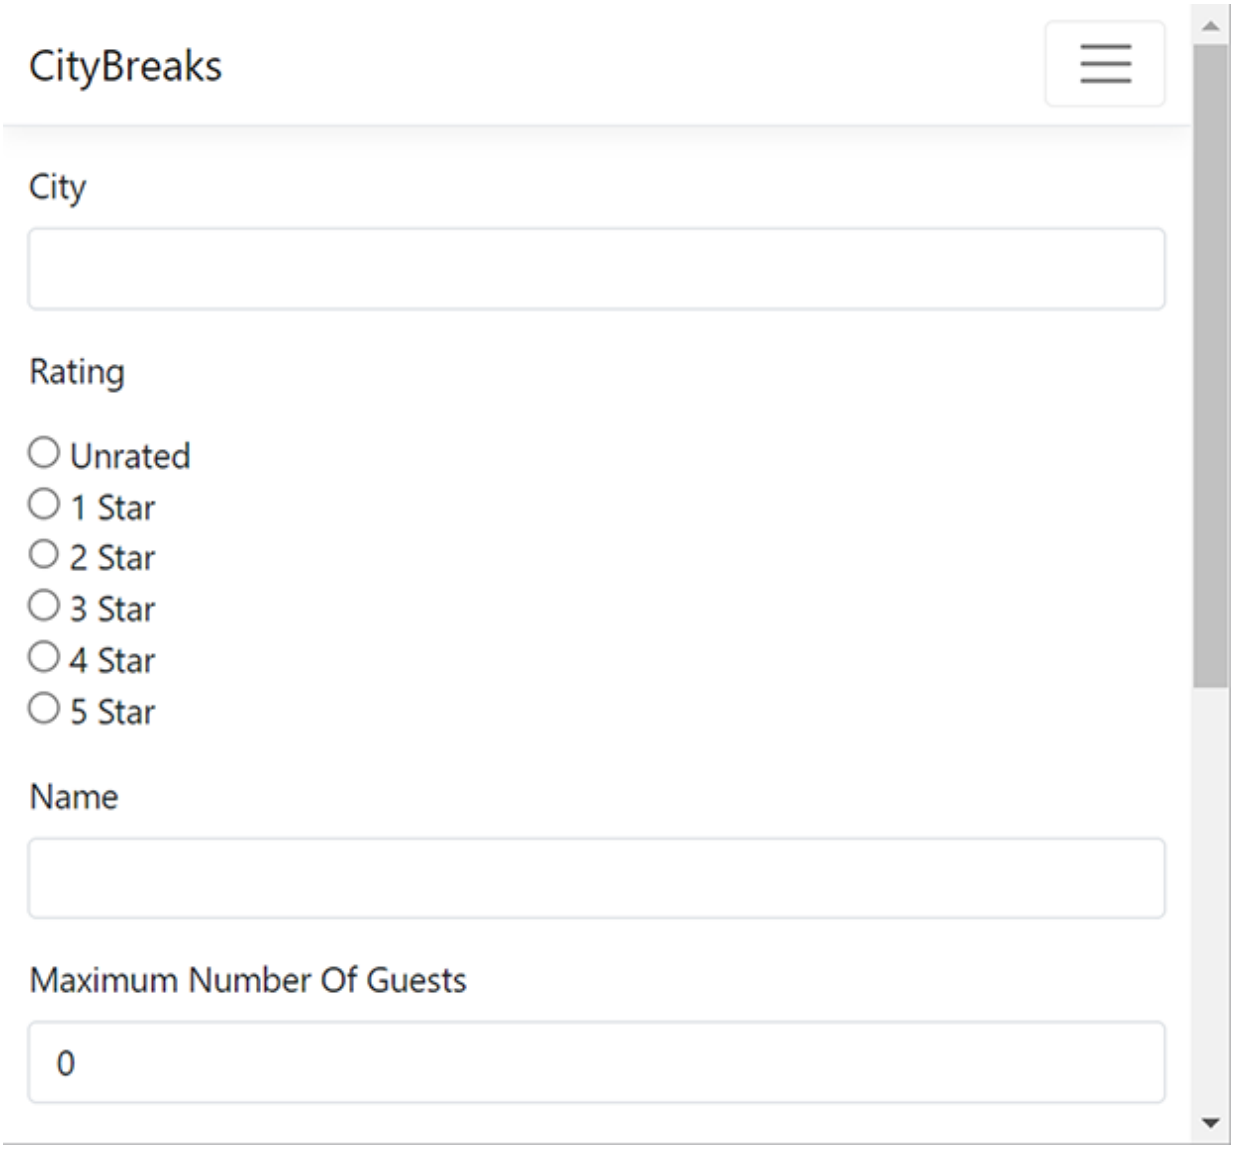


Figure 6.15 The rendered radios based on an enumeration

I've used the `Html.GetEnumSelectList` here to generate a collection of suitable types to work within the Razor page because the return type—`IEnumerable <SelectListItem>`—makes it easier to bind enumeration values to the radios. The data can be represented by any type that exposes properties that can be mapped to the value on the input and a descriptive label of some kind.