The `Services` property is an `IServiceCollection`, which is the framework's service container. It contains a collection of `ServiceDescriptor` objects, each one representing a registered service. A basic registered service consists of the *service type*, the *implementation*, and the service *lifetime*. The following listing shows how you can register the `ICityService` as a new `ServiceDescriptor`.

Listing 7.5 Registering the `ICityService` with the service container

```
builder.Services.AddRazorPages();
builder.Services.Add(new ServiceDescriptor(typeof(ICityService),
typeof(SimpleCityService), ServiceLifetime.Transient));
```

However, you are more likely to use one of the lifetime-specific extension methods available on the `IServiceCollection` that takes the service type and implementation as generic parameters (figure 7.4).

```
builder.Services.AddTransient<ICityService, SimpleCityService>();
```

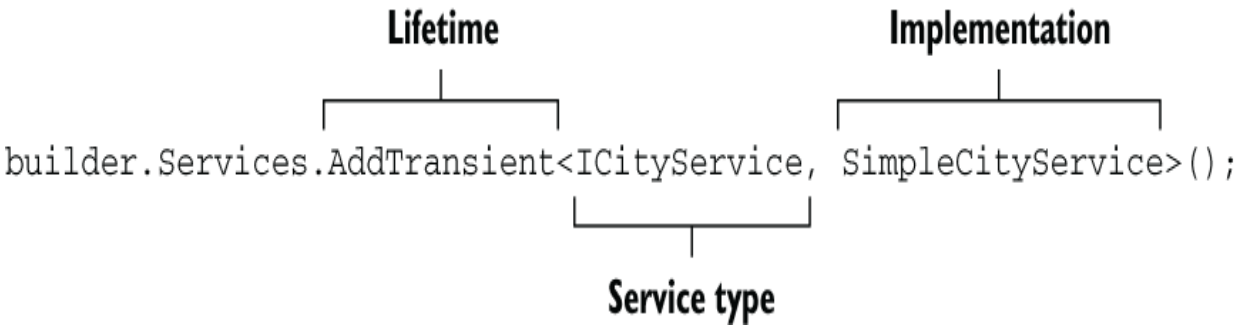


Figure 7.4 Registration results in a `ServiceDescriptor` object being added to the `IServiceCollection`, consisting of a service type, implementation, and lifetime.