The service container's job is to provide the correct implementation whenever a service type is requested—for example, being injected into a constructor. This process is also referred to as *resolving* the dependency. So when the container sees a request for an `ICityService`, it will provide an instance of `SimpleCityService` (figure 7.5).

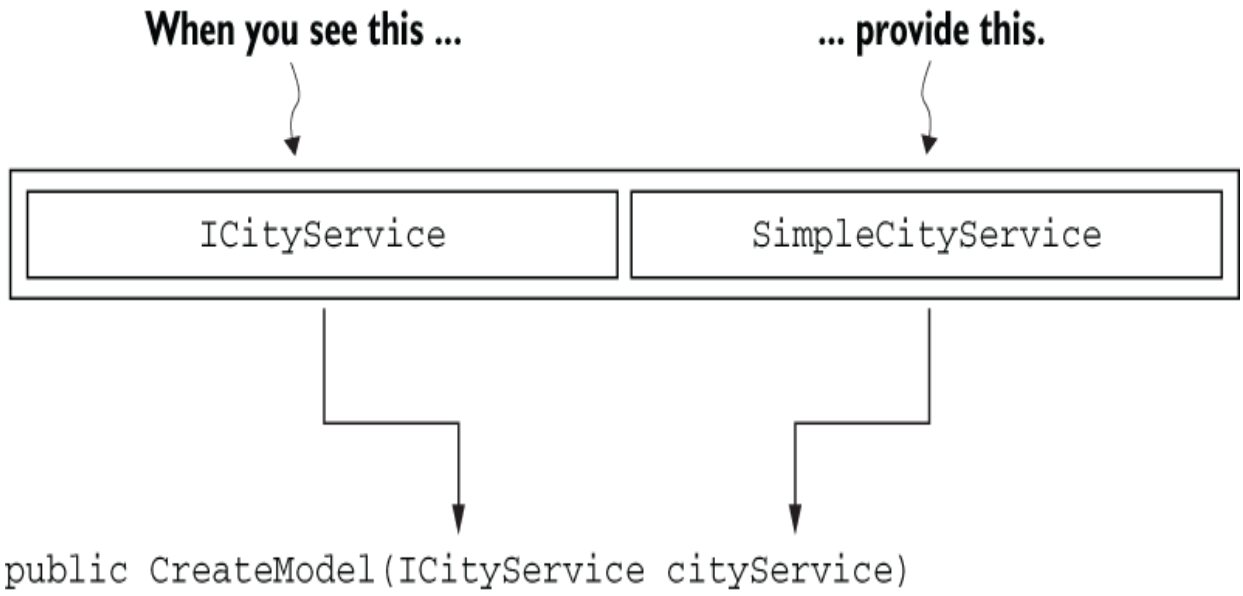


Figure 7.5 When the container sees a request for a service, it provides the implementation

7.2.2 Service lifetimes

The service container is not only responsible for resolving implementations. It is also responsible for managing the lifetime of the service. That is, the container is responsible for creating the service *and* destroying it, as determined by the lifetime the service is registered with. A service can be registered as having one of three lifetimes:

- Singleton
- Transient