❶ The PowerShell command to be executed from within the Package Manager Console in Visual Studio

❷ The CLI command to be executed from a command prompt located within the directory containing the csproj file

The migration is named `Create`. Successful execution of whichever command you used has resulted in a new folder being added to the project, named Migrations. Figure 8.5 shows the Migrations folder and its contents in the Visual Studio Code file explorer.

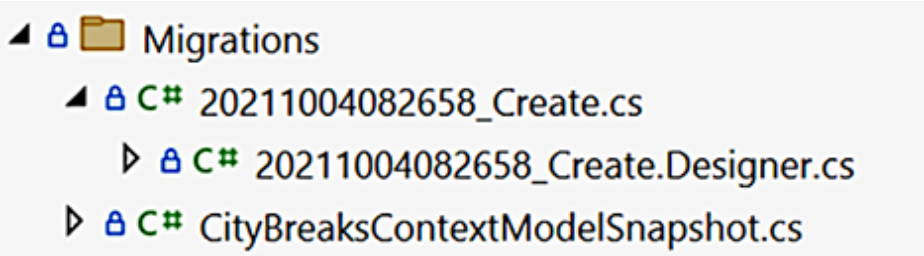


Figure 8.5 The generated Migrations folder, containing three files

The new folder contains three files:

1. *[Timestamp]_Create.cs*—Contains a class named `Create` with two methods: `Up` and `Down`. The `Up` method applies changes to the database, while the `Down` method reverts them.
2. *[Timestamp]_Create.Designer.cs*—Contains metadata used by EF Core.
3. *CityBreaksContextModelSnapshot.cs*—A snapshot of the model as it is currently. When you add another migration, this snapshot is used as the baseline to determine what has changed.

The first two files are specific to the migration. New ones will be added for additional migrations. The model snapshot file will be updated for each new migration. If you look at the contents of the `Up` method in the first file, the C# code should be self-explanatory. You are free to amend this as you see fit