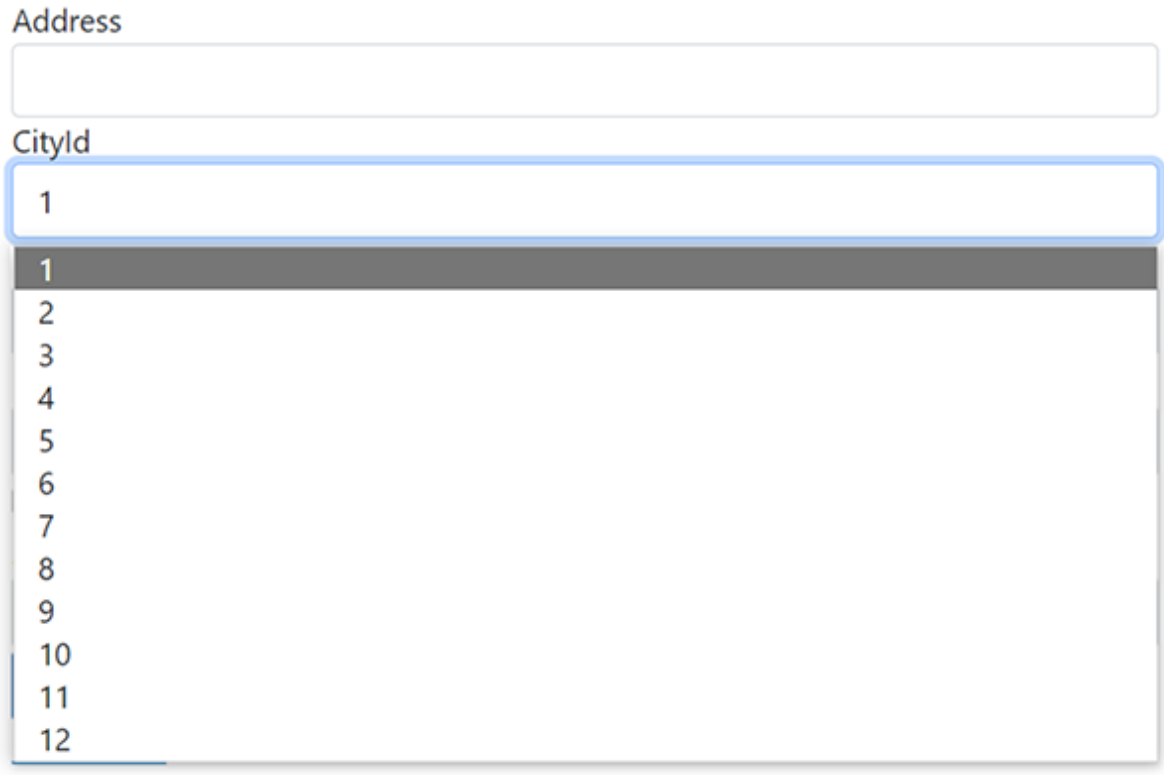


Figure 8.12 The key values appear in the select list, not the city names.

Your remediation plan will be to do the following:

1. Exchange the injected context for a service, enabling loose coupling.
2. Bind to individual properties to mitigate the security risk.
3. Reduce the reliance on `ViewData`.
4. Use asynchronous code wherever possible.

8.5 Creating, modifying, and deleting data

In this section, you will create a `PropertyService` to meet the requirements of the scenarios handled by the scaffolded pages. You will add methods to create and edit `Property` entities and retrieve single instances