based on their key value. You won't generate a method for deleting entities just yet. You will take a quick look at the code required to remove an item from the database later, but for this application, you will use a *soft delete*, marking an item as deleted without actually removing it.

In EF Core, operations that result in adding, updating, or deleting data can be performed directly against the `DbContext`, using its `Add`, `Update`, and `Remove` methods, respectively. Each of these methods takes the entity to be operated on as a parameter and sets its state to one of `Added`, `Modified`, or `Deleted`. You will call the asynchronous `SaveChangesAsync` method of the `DbContext` to commit the changes to the database. The context will generate the appropriate SQL based on the state of the entity. This workflow is illustrated in figure 8.13.

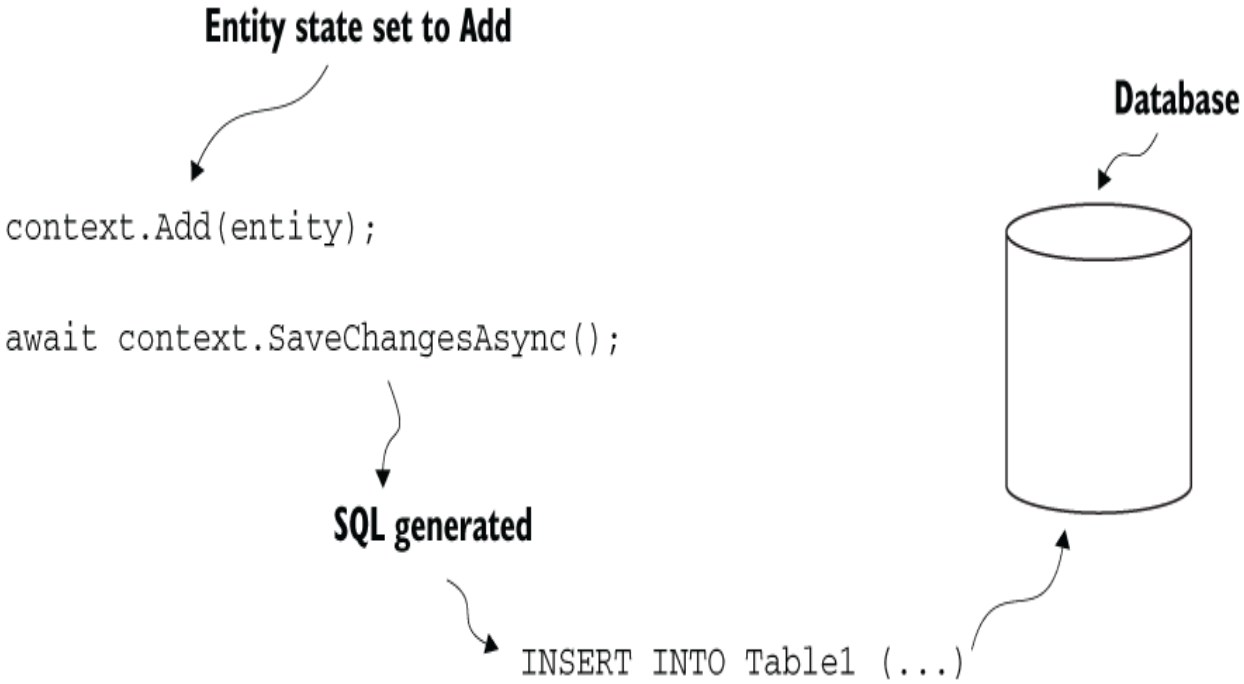


Figure 8.13 The `Add` method sets the state of the entity to `Added`. When `SaveChangesAsync` is called, EF Core generates an SQL `INSERT` statement and executes it against the database.