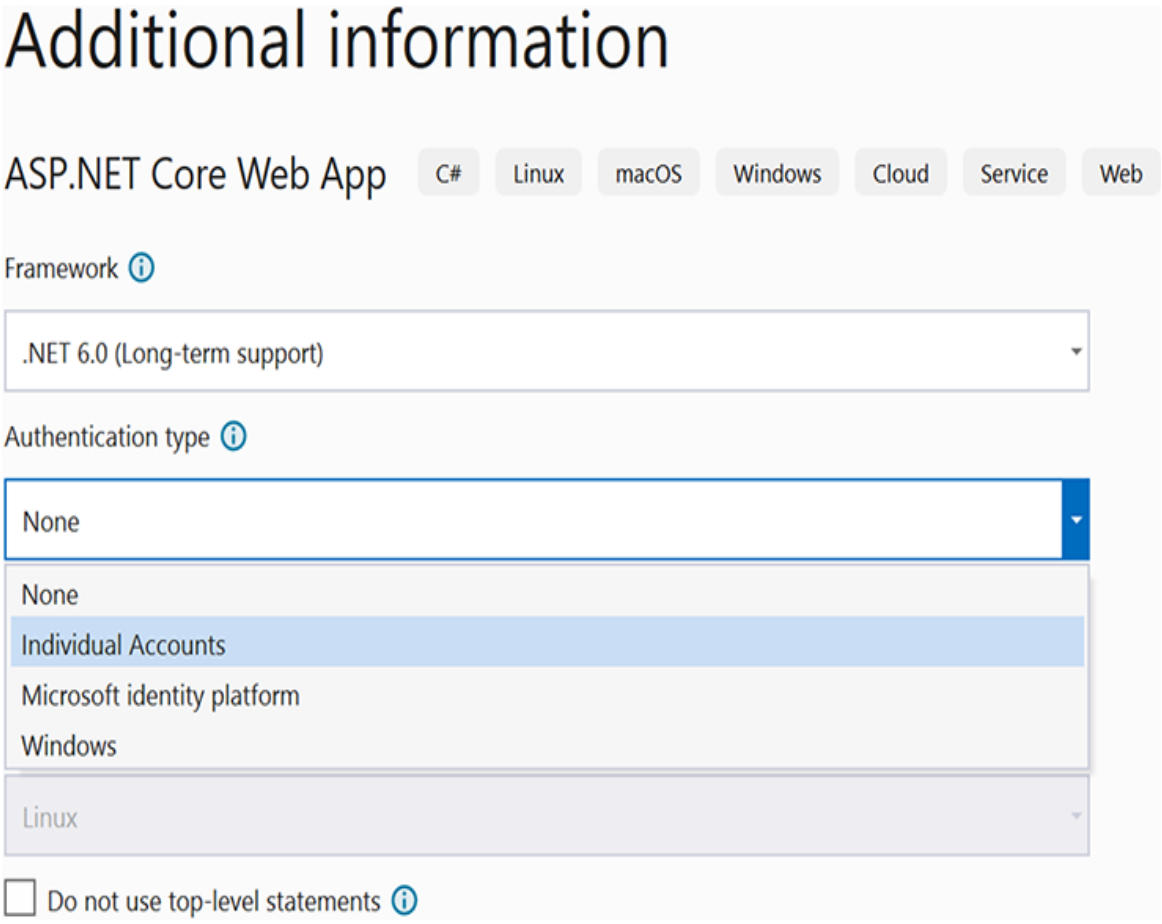


Figure 9.3 Select Individual Accounts to include Identity within the project.

If you create your application using the CLI, you can use the `--auth` or `-au` switch to specify that the new project uses individual accounts:

```
dotnet new webapp --auth Individual
```

However, you already have a project. There are certain steps you need to take to set it up to work with Identity. You need to add the required packages, add a class to represent your user, configure the existing database so it works with Identity, and then configure the services Identity relies on. Once those steps are completed, you can add a new migration that will update your existing database to act as an Identity store.