To fully understand the options you have set in this command and their longer alternative versions, you can execute `dotnet aspnet-codegenerator identity --help` at any time from the CLI.

Click Add in the dialog, or execute the command. Once completed, the code generator should have created a new folder named Areas, containing a series of nested folders and files (figure 9.12).

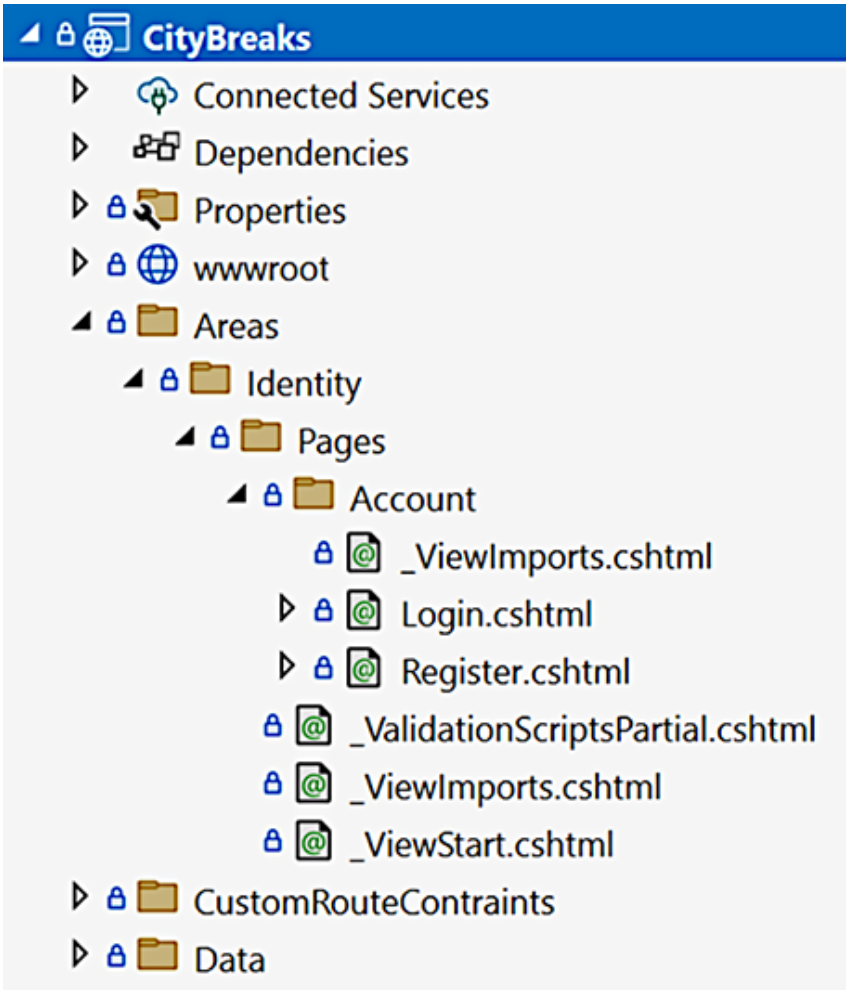


Figure 9.12 The scaffolded folders and files

Razor class libraries use a feature called *areas*, which I briefly touched on when discussing the `asp-area` attribute on anchor tag helpers. If you recall, earlier in the chapter, you had to include the `asp-area` attribute in the login tag