predefined groups of users, you will want to control authorization based on what you know about the individual user. The mechanism you will use to determine this is called *claims*.

10.3 Claims-based authorization

We touched on claims in the last chapter, but as a refresher, claims are simply name-value pairs that represent items of data you know about the user. They are attached to a `ClaimsIdentity`, which is then attached to the `ClaimsPrincipal` (see figure 10.3).

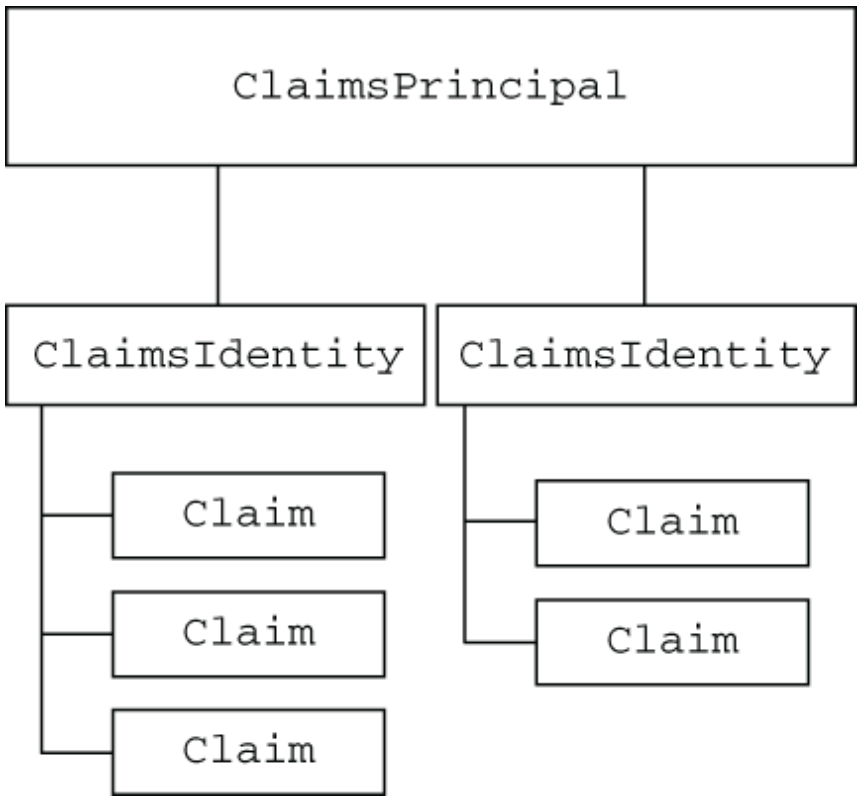


Figure 10.3 A `ClaimsPrincipal` supports multiple identities, each supporting multiple claims.