various claims to it. These include the `Name`, `Email` and, `NameIdentifier` (figure 10.4).

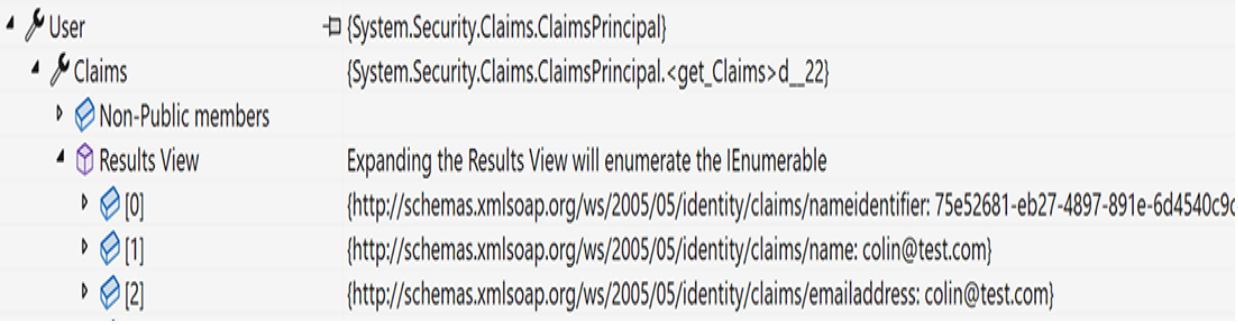


Figure 10.4 The populated claims of an authenticated user

If you want to use claims as the basis for managing authorization, you need some way to assign other claims that relate to levels of access and test whether the user qualifies based on the presence or value of the claims they have. In the next section, you will create a simple page that enables adding new claims to users.

10.3.1 Adding claims to users

You will start by adding a new folder to the Pages folder named ClaimsManager. Within that, you will add a new Razor page named Index. This will list all users who have additional claims assigned to them and details of the claims that have been assigned.

The `PageModel` code for the ClaimsManager Index page takes the `UserManager` as an injected dependency and assigns it to a `public` property, so it is accessible to the Razor part of the page via its `Model` property. It is also used within the `OnGetAsync` method to populate a collection of `CityBreaksUser` objects.