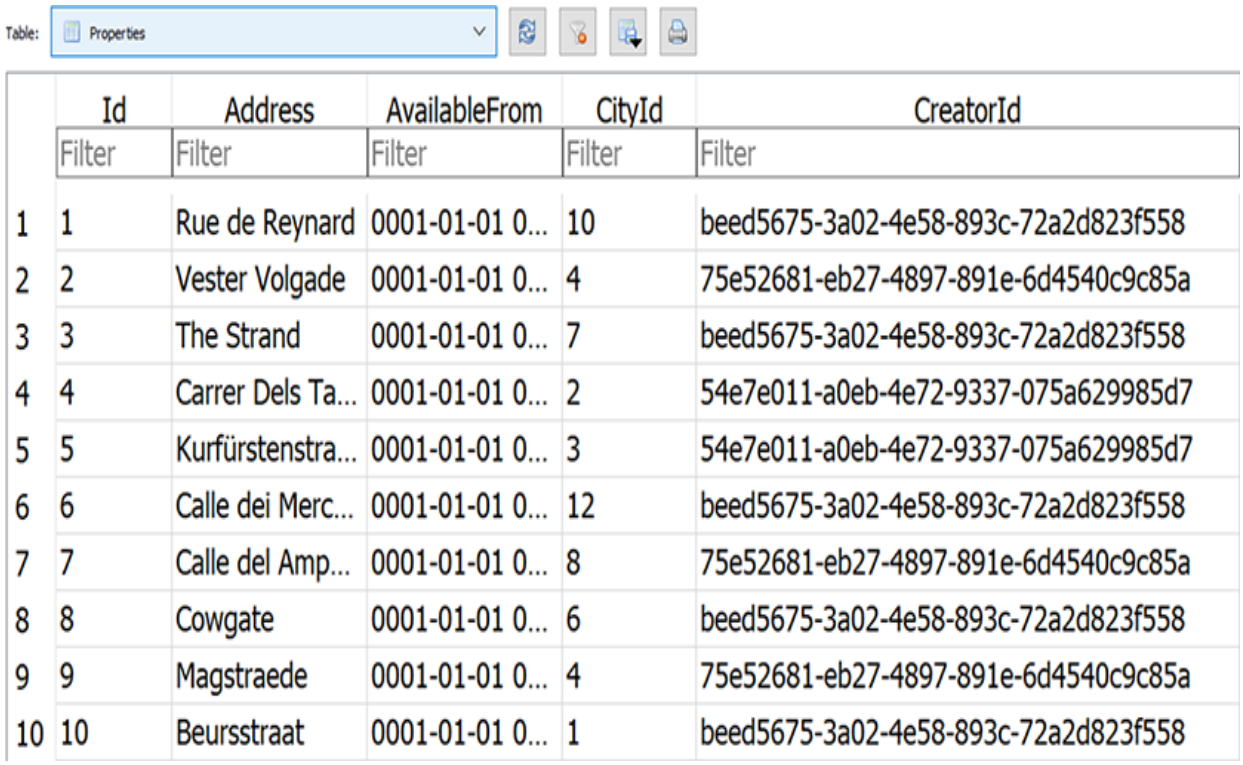


	Id	Address	AvailableFrom	CityId	CreatorId
	Filter	Filter	Filter	Filter	Filter
1	1	Rue de Reynard	0001-01-01 0...	10	beed5675-3a02-4e58-893c-72a2d823f558
2	2	Vester Volgade	0001-01-01 0...	4	75e52681-eb27-4897-891e-6d4540c9c85a
3	3	The Strand	0001-01-01 0...	7	beed5675-3a02-4e58-893c-72a2d823f558
4	4	Carrer Dels Ta...	0001-01-01 0...	2	54e7e011-a0eb-4e72-9337-075a629985d7
5	5	Kurfürstenstra...	0001-01-01 0...	3	54e7e011-a0eb-4e72-9337-075a629985d7
6	6	Calle dei Merc...	0001-01-01 0...	12	beed5675-3a02-4e58-893c-72a2d823f558
7	7	Calle del Amp...	0001-01-01 0...	8	75e52681-eb27-4897-891e-6d4540c9c85a
8	8	Cowgate	0001-01-01 0...	6	beed5675-3a02-4e58-893c-72a2d823f558
9	9	Magstraede	0001-01-01 0...	4	75e52681-eb27-4897-891e-6d4540c9c85a
10	10	Beursstraat	0001-01-01 0...	1	beed5675-3a02-4e58-893c-72a2d823f558

Figure 10.8 Update properties, so the `CreatorId` column is populated with the `Id` values of existing users.

10.4.1 Creating a requirement and a handler

Resource authorization is more or less identical to other authorization. It needs a requirement and a handler. For the requirement, I'm going to use the `OperationAuthorizationRequirement` class that comes with ASP.NET Core authorization. This is a helper class that has a single property: `Name`. The class is intended to represent authorization requirements specific to the most common operations performed on data. Create an instance of this class for each operation you want to authorize, and then set the `Name` property accordingly. Listing 10.25 shows a number of instances, representing the basic CRUD operations, grouped together within